

SWIT®

Solutions With Innovative Technology
www.swit.cc

©2026 SWIT Electronics Co., Ltd. All rights reserved.
Features, specifications and appearances are subject to change without notice.
All non-metric weights and measures are approximate.
SWIT is the registered trademark of SWIT Electronics Co., Ltd.

VER: 2026-03-20(EN)



SWIT Electronics Co., Ltd.

Add: 10 Hengtong Road, Xin'gang, Nanjing Economic and Technological Development Zone, Nanjing 210038, P.R.China
Tel: +86-25-85805753 Email: contact@swit.cc

SWIT Electronics Europe GmbH

Add: Heerdterbuschstraße 10 / HALLE 9, 41460 Neuss, NRW Germany
Tel: +49(0)21316632331 Email: info@swit-europe.com

SWIT Electronics America, Inc

Add: 3350 Scott Boulevard 61-02, Santa Clara, CA 95054, USA
Tel: (408)260-8258, 1-866-986-SWIT(7948) Email: info@swit.us

Distributed by:

SWIT® | 30th

PRODUCT CATALOGUE 2026/27



Monitor


Wireless

Battery

Light Solution



Global Distribution

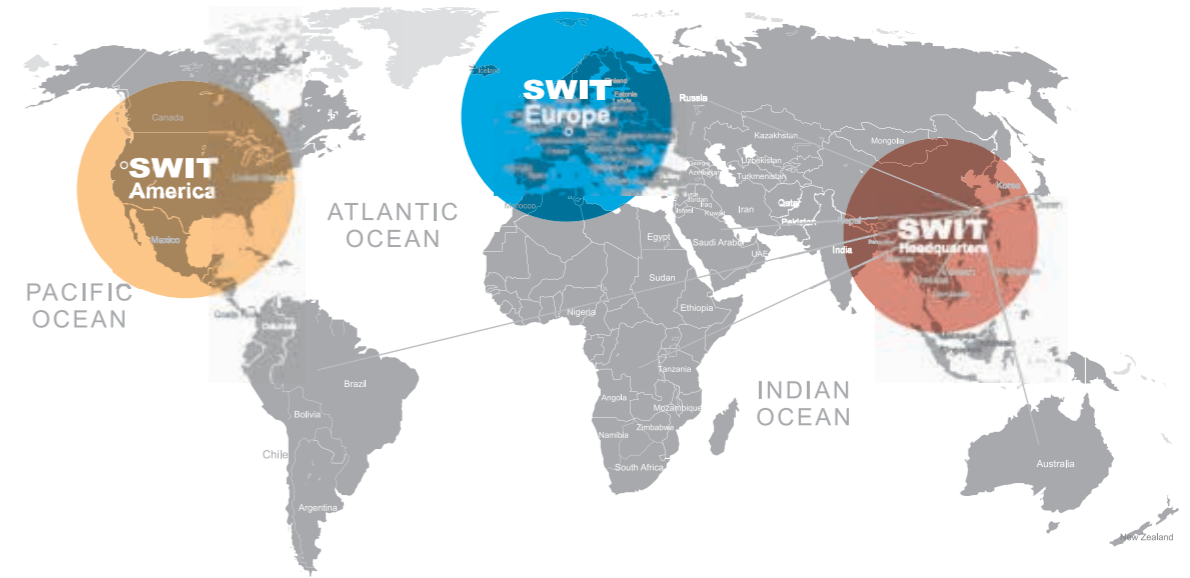

About us

SWIT Electronics Co., Ltd. was founded in 1996 and is a leading developer and manufacturer of broadcast and film industry products. Our product range encompasses camera and studio monitors, wireless video transmission systems, professional camera batteries and power solutions, as well as studio lighting system solutions.

SWIT headquarters is located in Nanjing, China, with the European subsidiary based in Nordrhein-Westfalen, Germany, and the American subsidiary in California, USA. SWIT boasts an independent R&D center and has been granted over 50 international patents.

Over the years, SWIT has garnered a stellar reputation worldwide for our exceptional and innovative products. We have established an international distribution network that spans over 100 countries and regions globally.

The trademark "SWIT" is registered in more than 60 countries worldwide. When you choose SWIT, you can expect Quality, Reliability, Creativity, and Compatibility - the hallmarks of a trusted brand and your preferred choice.

Product Lines

Pro Monitor

Broadcast & film production, 4K/8K UHD 12G-SDI, NDI, QLED and Local dimming Mini-LED HDR panel, with full range of video scopes, 3DLUT, auto calibration, etc.



Wireless Video

Professional 5.1-5.9GHz SDI & HDMI wireless transmission system from 150m to 3km, DFS comply, wall-cross, for field productions, director monitoring, drones, etc.



Power Solution

Full range of B-mount, V-mount, Gold mount, NP-1 style, various DV batteries, and chargers, power stations for cameras, lights and all related equipments.




Lighting System

Studio lighting solutions, Panel and Fresnel LED lights, Bi-color and RGB color, with complete accessories: Rail system, pantographs, Pole operation, DMX console, etc.



Monitors & Wireless

Broadcast Studio
OB Van / EFP
On-site Filming
Post Productions

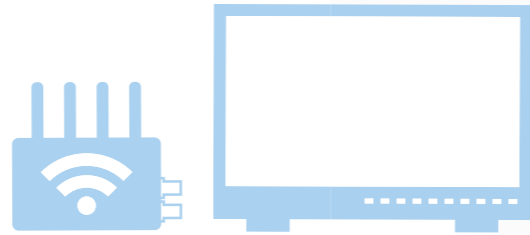

The 27-inch 4K 12G-SDI HDR monitor in OB van production.

Model: BM-U275HDR, Page 10.



The 23.8-inch studio monitor in broadcast live production.

Model: S-1243F, Page 12.



The 21.5-inch 12G-SDI 4K monitor in live production, Beijing Winter Olympic Game 2022.

Model: BM-H215HDR, Page 11.



The 1.2km wireless SDI receiver and director monitor working on site.

Model: K21-FC, Page 6; CREW, Page 14



The 15.4-inch high bright monitor, perfect size for in-car moving shot.

Model: K15, Page 6.



The 23.8-inch studio monitor and 600m wireless transmission on an interview production.

**Model: S-1243F, Page 12;
FLOW2000, Page 16.**



Zero Latency 4K monitor used in Baltic Opera, Poland, can display the live video feed from the orchestra pit in real time, allowing performers to follow the conductor's gestures with perfect synchronization.

Model: BM-H215HDR, Page 11.



The 31.5-inch Local Dimming 4K HDR monitor, 1,000,000:1 ultra contrast for color grading and post productions. @visualequence

Model: BM-U325MD, Page 9.



The 31.5-inch Local Dimming 4K HDR monitor, 1,000,000:1 ultra contrast for high level live productions with 4x 12G-SDI quadview.

Model: BM-U325MD, Page 9.



The 600m wireless SDI receivers, up to 22 camera channels working wirelessly together, no interference to each other.

Model: FLOW2000 (Rx), Page 16.





K7

2800nits



K7


7-inch 2800nits Touch On-Camera Monitor

- ◆ 7-inch, 1920×1080 FHD display panel
- ◆ Optically bonded multi-touch screen
- ◆ 2800nits ultra bright sunlight view
- ◆ All-metal with rubber corner anti-crash guards
- ◆ 3G/HD/SD-SDI and HDMI 2.0 (4K60P) in & out
- ◆ SDI & HDMI cross conversion
- ◆ Built-in Delog Luts and User Luts upload via SD card
- ◆ SDI & HDMI outputs support LUTs
- ◆ Screenshot capture and overlay with transparency
- ◆ Peaking, Zebra, False color and full assist scopes
- ◆ 4-ch audio meters and 3.5mm audio outputs
- ◆ Built-in dual NP-F battery slots with hot swap
- ◆ 2-pin LEMO 7-34V and USB-C PD 9-20V DC input
- ◆ Provide monitor cage with sunhood for option

2800nits Touch



Optional Accessory

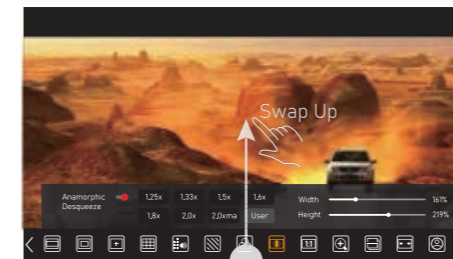

Quick tools deck



Capture and Overlay



Monitor Cage with sunhood

S-1093F

9-inch FHD On-Camera Monitor

- ◆ 9-inch IPS LCD, 1920×1200 resolution
- ◆ 3G/HD/SD-SDI, HDMI, CVBS monitoring
- ◆ 16-ch audio meters and select any 2-ch to output
- ◆ Waveform Y/Cb/Cr/R/G/B and single line
- ◆ Vector scope, R/G/B/Y histogram
- ◆ AFD, H/V delay, SDI timecode display
- ◆ Focus assist, Zebra, R/G/B/Mono, False color
- ◆ TSL UMD and text TALLY display
- ◆ Front / Rear TALLY light and GPI control
- ◆ 4pin XLR DC in & V/Gold/DV plates for option



Focus Assist	Peaking	Overlay	User Luts
Waveform	False Color	Histogram	Zebra
Scale Marker	Grid	Safe Area	Anamorphic
Mono Color	Audio Meter	Zoom-in	Flip / Rotate



K15 & K21

15.4"/21.5" 1500nits

Field Monitor



- Any Ratio
- Safe Area
- Center
- CrossHatch
- Anamorphic
- False Color
- Zebra
- Waveform
- Vector
- Histogram
- Focus Assist
- Peaking
- De-Log
- Scopes
- Audio Meter
- Timecode



4× Corner Guards
Anti-crash



2× Cheese boards
Rear/Side free install



Protective Glass
Quick release



10×10 VESA to
Light Stand Adaptor

K15

15.4-inch 1500nits Field Monitor



- ◆ 15.4-inch 1920×1200 10bit IPS Panel
- ◆ 1500nits high bright sunlight view
- ◆ Near OLED high contrast deep black
- ◆ Rubber corner anti-crash guards
- ◆ 2K/3G/HD/SD-SDI & 4K-HDMI Monitoring
- ◆ Built-in Multi-camera Delog Luts SDR & HDR
- ◆ 10× User 3DLuts cubes upload by USB-A
- ◆ Automatic 3DLuts calibration by USB-C
- ◆ Scene OS - 8 pages create quick switching
- ◆ 4× function keys assigned for each scene
- ◆ Anamorphic de-squeeze
- ◆ Custom False color / Zebra values
- ◆ Waveform / Vector scopes / Histogram
- ◆ Peaking / Focus assist / Crosshatch / Safe area
- ◆ SDI audio meters / Timecode display
- ◆ AC / 4-pin XLR / V-mount battery power



Standard Package



K21

21.5-inch 1500nits Field Monitor



- ◆ 21.5-inch 1920×1080 10bit IPS Panel
- ◆ 1500nits high bright sunlight view
- ◆ Rubber corner anti-crash guards
- ◆ 2K/3G/HD/SD-SDI & 4K-HDMI Monitoring
- ◆ Built-in Multi-camera Delog Luts SDR & HDR
- ◆ 10× User 3DLuts cubes upload by USB-A
- ◆ Automatic 3DLuts calibration by USB-C
- ◆ Scene OS - 8 pages create quick switching
- ◆ 4× function keys assigned for each scene
- ◆ Anamorphic de-squeeze
- ◆ Custom False color / Zebra values
- ◆ Waveform / Vector scopes / Histogram
- ◆ Peaking / Focus assist / Crosshatch / Safe area
- ◆ SDI audio meters / Timecode display
- ◆ AC / 4-pin XLR / V-mount battery power



Standard Package



Shipping in Flight Case (SKU: K21-FC)





1000nits



FM-215HDR 21.5-inch 1000nits Field Production Monitor

- ◆ 21.5-inch 1920×1080 FHD QLED Panel
- ◆ 1000nits high bright PQ/HLG/S-log3 HDR display
- ◆ 100% DCI-P3 wide color gamut coverage
- ◆ 12G-SDI, 4×3G-SDI, HDMI 2.0 4K input
- ◆ 4-ch 12G/6G/3G/HD-SDI/HDMI mixed Quadview
- ◆ Any 2 inputs Pic-by-Pic and Pic-in-Pic display
- ◆ Horizontal and Vertical (cropped) PBP view
- ◆ Built-in multiple Delog Luts and User 3DLuts upload
- ◆ 0.01 frames Zero latency video processing
- ◆ 3DLUT Auto Self-calibration without PC
- ◆ Waveform / Focus assist / False color / Zebra
- ◆ Anamorphic De-squeeze
- ◆ On-board V-mount battery plate

Standard Package

Optional Purchase




1000nits



FM-U245HDR 23.8-inch UHD 1000nits Field Monitor

- ◆ 23.8-inch 10bit 3840×2160 UHD, 18bit processing
- ◆ 1000nits high bright PQ/HLG/S-log3 HDR display
- ◆ 12G-SDI 4 in 4 out, 8K input ready, HDMI2.0 in
- ◆ 4-ch 12G/6G/3G/HD-SDI/HDMI mixed Quadview
- ◆ Any 2 inputs Pic-by-Pic and Pic-in-Pic display
- ◆ Any 3 inputs Pic-by-Pic 90° rotate vertical display
- ◆ HLG1000, PQ1000, S-log3 HDR gamma select
- ◆ 0.01 frames Zero latency video processing
- ◆ Built-in multiple Delog Luts and User 3DLuts upload
- ◆ 3DLut Auto Self-calibration without PC
- ◆ Waveform / Vector / Histogram / Eye pattern
- ◆ On-board V-mount battery plate
- ◆ Junior baby double riser stand mounting

Standard Package

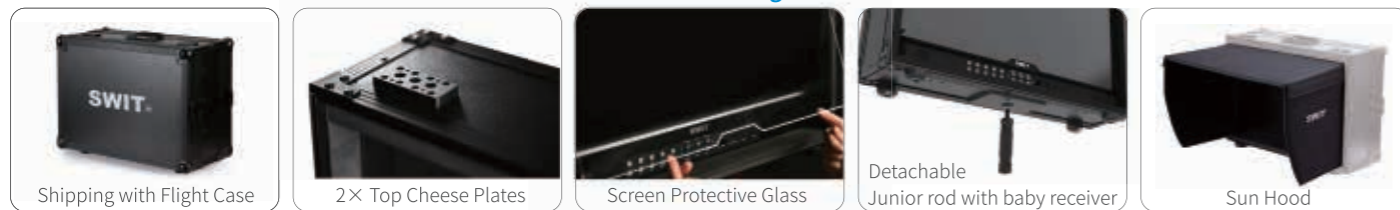

X21 21.5-inch 1000nits Field Production Monitor


- ◆ 21.5-inch 1920×1080 FHD IPS Panel
- ◆ 1000nits high bright sunlight view
- ◆ Aluminum Rock Case, 80cm Drop, 80kg impact
- ◆ 1×12G-SDI, 3×3G-SDI, 1×HDMI 2.0 4K input
- ◆ 4-ch 12G/6G/3G/HD-SDI/HDMI mixed Quadview
- ◆ Any 3 inputs ±90° Rotate Vertical Pic-by-Pic view
- ◆ Quick audio selection for any source in Multiview
- ◆ PQ/HLG/S-log3 HDR Gamma selection
- ◆ Built-in Delog Luts and User 3DLuts upload
- ◆ 0.01 frames Zero latency video processing
- ◆ 3DLUT Auto Self-calibration without PC
- ◆ Waveform/ Vector scopes/ 8-ch audio meters
- ◆ Focus assist/ False color/ Zebra/ Anamorphic De-squeeze
- ◆ On-board V-mount battery plate



In Aluminum Rock Case



Multi-view Layout

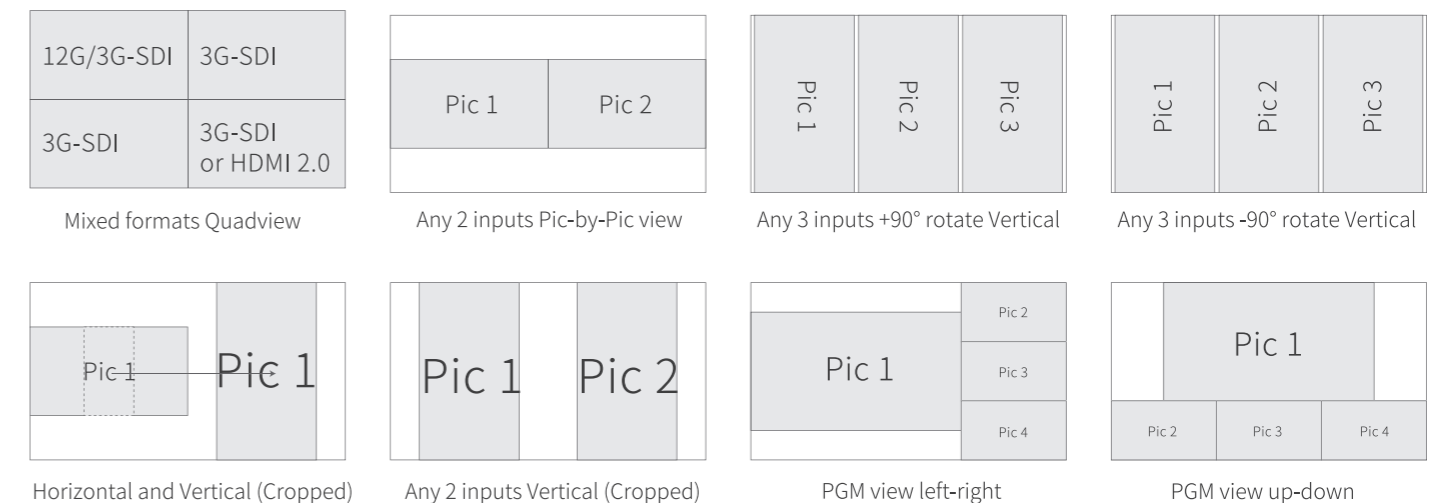

Mini-LED

1500nits 1,000,000:1
4K HDR Production


1500nits 1,000,000:1



4K 3840
1500 nits
1M contrast
12G 4in 4out
HDR PQ/HLG

BM-U325MD 31.5-inch UHD Mini-LED HDR Monitor

- 31.5" 10-bit 3840×2160 UHD, 18-bit processing
- 2304 zones local dimming Mini-LED panel
- 1500nits high bright, 1,000,000:1 contrast ratio
- 12G-SDI 4 in 4 out, 8K input ready, HDMI2.0 in
- 12GSDI/ST 2110 via fiber by optional SFP adaptor
- 4-ch 12G/6G/3G/HD-SDI/HDMI mixed Quadview
- Any 2 inputs Pic-by-Pic and Pic-in-Pic display
- Rec.2020, DCI-P3, Rec.709 color gamut select
- HLG1000, PQ1000, S-log3 HDR select
- Payload ID identified EOTF, color space etc
- 3DLut Auto Self-calibration without PC
- 0.01 frames Zero latency video processing
- Waveform / Vector / Histogram / Eye pattern
- 16-ch audio meters / Lissajous / Surround pattern
- IP Webserver remote control

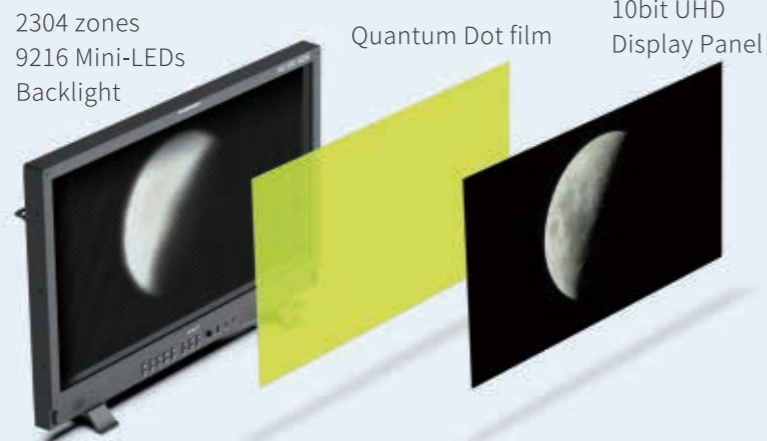

Local Dimming Mini-LED

SWIT dedicated Mini-LED panel tech with unique local dimming drivers and advanced image-backlight algorithms, to reach 1,000,000:1 contrast, and greatly restrain the halo effect, ensure full viewing angle to display brilliantly bright, impeccably dark HDR contents.

1000nits



4K 3840
12G 4in 4out
1000 nits
HDR PQ/HLG

BM-U245HDR 23.8-inch UHD

- 23.8" 10bit 3840×2160 UHD, 18bit processing
- 1000nits high bright PQ/HLG/S-log3 HDR display
- 12G-SDI 4 in 4 out, 8K input ready, HDMI2.0 in
- 4-ch 12G/6G/3G/HD-SDI/HDMI mixed Quadview
- HLG1000, PQ1000, S-log3 HDR gamma select
- 3DLut Auto Self-calibration without PC
- 0.01 frames Zero latency video processing
- Waveform / Vector / Histogram / Eye pattern
- 16-ch audio meters / Lissajous / Surround pattern

1000nits



4K 3840
12G 4in 4out
1000 nits
HDR PQ/HLG

BM-U275HDR 27-inch UHD

- 27" 10bit 3840×2160 UHD, 18bit processing
- 1000nits high bright PQ/HLG/S-log3 HDR display
- 12G-SDI 4 in 4 out, 8K input ready, HDMI2.0 in
- 4-ch 12G/6G/3G/HD-SDI/HDMI mixed Quadview
- HLG1000, PQ1000, S-log3 HDR gamma select
- 3DLut Auto Self-calibration without PC
- 0.01 frames Zero latency video processing
- Waveform / Vector / Histogram / Eye pattern
- 16-ch audio meters / Lissajous / Surround pattern



4K 3840
12G 4in 4out
HDR PQ/HLG

BM-U175 17.3-inch UHD

- 17.3" 3840×2160, 18bit processing
- 12G-SDI 4 in 4 out, 8K in, HDMI2.0 in
- 12G/6G/3G/HD-SDI/HDMI Quadview
- HLG1000, PQ1000, S-log3 HDR select
- 3DLut Auto Self-calibration without PC
- 0.01 frames Zero latency processing
- Waveform / Vector / Eye pattern
- 16-ch audio/Lissajous/Surround pattern
- 19-inch 7U rack mountable



4K 3840
12G 4in 4out
HDR PQ/HLG

BM-U245 23.8-inch UHD

- 23.8" 3840×2160, 18bit processing
- 12G-SDI 4 in 4 out, 8K in, HDMI2.0 in
- 12G/6G/3G/HD-SDI/HDMI Quadview
- HLG1000, PQ1000, S-log3 HDR select
- 3DLut Auto Self-calibration without PC
- 0.01 frames Zero latency processing
- Waveform / Vector / Eye pattern
- 16-ch audio/Lissajous/Surround pattern



4K 3840
12G 4in 4out
HDR PQ/HLG

BM-U325 31.5-inch UHD

- 31.5" 3840×2160, 18bit processing
- 12G-SDI 4 in 4 out, 8K in, HDMI2.0 in
- 12G/6G/3G/HD-SDI/HDMI Quadview
- HLG1000, PQ1000, S-log3 HDR select
- 3DLut Auto Self-calibration without PC
- 0.01 frames Zero latency processing
- Waveform / Vector / Eye pattern
- 16-ch audio/Lissajous/Surround pattern



1000nits



- 100% DCI-P3
- 1000 nits
- 12G in&out
- 4x3G Quad 4K
- HDR PQ/HLG

BM-H215HDR 21.5-inch 1000nits 4K

- 21.5-inch 1920×1080 QLED Panel, 100% DCI-P3 coverage
- 1000nits high bright PQ/HLG/S-log3 HDR display
- VICO 1.97 A-class Eye Protecting
- 1×12G-SDI, 4×3G-SDI 4K, HDMI2.0 4K input
- 4-ch 12G/6G/3G/HD-SDI/HDMI mixed Quadview
- 3DLut Auto Self-calibration without PC
- 0.01 frames Zero latency video processing
- Waveform / Vector / Histogram / 12G-SDI Eye pattern
- 16-ch audio meters / Lissajous pattern



- 100% DCI-P3
- 12G in&out
- 4x3G Quad 4K
- HDR PQ/HLG

BM-H245 23.8-inch 4K Input

- 23.8-inch 1920×1080 QLED Panel
- 100% DCI-P3 wide color gamut coverage
- VICO 1.97 A-class Eye Protecting
- 1×12G-SDI, 4×3G-SDI 4K, HDMI2.0 4K input
- 4-ch 12G/6G/3G/HD-SDI/HDMI mixed Quadview
- 3DLut Auto Self-calibration without PC
- 0.01 frames Zero latency video processing
- Waveform / Vector / Histogram / 12G-SDI Eye pattern
- 16-ch audio meters / Lissajous pattern



S-1173F 17.3-inch FHD

- 17.3-inch LCD Panel, 1920×1080 resolution
- 3G/HD/SD-SDI (×2), HDMI, YUV, VGA, CVBS input
- 16-ch audio meters and select any 2-ch to output
- 3DLUT accurate color calibration
- Waveform Y/Cb/Cr/R/G/B and single line
- Vector scope, histogram R/G/B/Y, Focus assist
- False Color, R/G/B/Mono, Zebra stripes
- AFD, Timecode, H/V delay, TSL UMD
- 4-pin XLR DC and V-mount plate power in
- 19-inch 7U rack mount



S-1223F 21.5-inch FHD

- 21.5-inch LCD Panel, 1920×1080 resolution
- 3G/HD/SD-SDI (×2), HDMI, YUV, VGA, CVBS input
- 16-ch audio meters and select any 2-ch to output
- 3DLUT accurate color calibration
- Waveform Y/Cb/Cr/R/G/B and single line
- Vector scope, histogram R/G/B/Y, Focus assist
- False Color, R/G/B/Mono, Zebra stripes
- AFD, Timecode, H/V delay, TSL UMD
- 4-pin XLR DC and V-mount plate power in



NDI

BM-215-NDI 21.5-inch NDI® Monitor

- 21.5-inch 1920×1080 QLED Panel
- 100% DCI-P3 wide color gamut coverage
- VICO 1.97 A-class Eye Protecting
- High bandwidth 4K NDI®, 3GSDI and HDMI2.0 input
- NDI® decode to 3GSDI output
- NDI®/SDI/HDMI Pic-by-Pic and Pic-in-Pic view
- Auto detect and quick select NDI® sources
- 3DLut Auto Self-calibration without PC
- Waveform / Vector / Histogram / False color / Zebra



NDI

BM-245-NDI 23.8-inch NDI® Monitor

- 23.8-inch 1920×1080 QLED Panel
- 100% DCI-P3 wide color gamut coverage
- VICO 1.97 A-class Eye Protecting
- High bandwidth 4K NDI®, 3GSDI and HDMI2.0 input
- NDI® decode to 3GSDI output
- NDI®/SDI/HDMI Pic-by-Pic and Pic-in-Pic view
- Auto detect and quick select NDI® sources
- 3DLut Auto Self-calibration without PC
- Waveform / Vector / Histogram / False color / Zebra



S-1243F 23.8-inch FHD

- 23.8-inch LCD Panel, 1920×1080 resolution
- 3G/HD/SD-SDI (×2), HDMI, YUV, VGA, CVBS input
- 16-ch audio meters and select any 2-ch to output
- 3DLUT accurate color calibration
- Waveform Y/Cb/Cr/R/G/B and single line
- Vector scope, histogram R/G/B/Y, Focus assist
- False Color, R/G/B/Mono, Zebra stripes
- AFD, Timecode, H/V delay, TSL UMD
- 4-pin XLR DC and V-mount plate power in



M-1093F Dual 9-inch Rack Mount

- 9-inch LCD×2, 1920×1200 resolution
- Standard 19" 4U rack install, ±30° rotatable
- 3G/HD/SD-SDI, HDMI, CVBS input
- 16-ch audio meters and select any 2-ch to output
- Waveform Y/Cb/Cr/R/G/B and single line
- Vector scope, histogram R/G/B/Y, Focus assist
- False Color, R/G/B/Mono, Zebra stripes
- AFD, Timecode, H/V delay, TSL UMD
- Front TALLY light and GPI control



CREW

Long Range Wireless Video
Stable As Always



Pro Chip
Stable Wireless



Up to 3km
Long Range



TT → 4R
Multi-Cast



MetaData
Transmit



USB-C
Video Capture



KUWI 2.0 Professional Chip, Stable As Always

The New Generation KUWI2.0 professional chip for wireless video, 5.1-5.9GHz License-Free; inherits the stability advantages of SWIT wireless products, ensures the stable transmission in the most complex environment.



Proprietary RF Protocol

Professional KUWI proprietary RF, **NOT WIFI** tech, will not interfere with personal smart devices or wireless devices in public facilities.



Auto Frequency Switch

With frequency scanner built-in, constantly detect the interference conditions and auto switch to the optimal channel seamlessly.



Receiving Feedback Tech

The Rx continuously reports the receiving status to the Transmitter, and the system will adjust the RF power and encoding bitrate based on the actual receiving distance.



1.2km

CREW SDI&HDMI 1.2km Wireless



- ◆ KUWI 5.1-5.9GHz licence free wireless technology
- ◆ Built-in freq. scanner, auto select the best channel
- ◆ 3G-SDI & HDMI video transmission
- ◆ Receiver USB-C video capture output for PC/Mac
- ◆ Up to 4,000ft/1.2km (Line-of-Sight) distance
- ◆ 1× Transmitter to Max 4× Receivers Multi-cast
- ◆ Fixed 32ms stable ultra low latency
- ◆ Metadata transmission and timecode trigger
- ◆ 2-pin LEMO DC and NP-F battery power



1.2km

CREW-V SDI&HDMI 1.2km Wireless



- ◆ KUWI 5.1-5.9GHz licence free wireless technology
- ◆ Built-in freq. scanner, auto select the best channel
- ◆ 3G-SDI & HDMI video transmission
- ◆ Receiver USB-C video capture output for PC/Mac
- ◆ Up to 4,000ft/1.2km (Line-of-Sight) distance
- ◆ 1× Transmitter to Max 4× Receivers Multi-cast
- ◆ Fixed 32ms stable ultra low latency
- ◆ Metadata transmission and timecode trigger
- ◆ 2-pin LEMO DC power, V-mount male and female



3km

CREW Max SDI&HDMI 3km Wireless



- ◆ KUWI 5.1-5.9GHz licence free wireless technology
- ◆ Built-in freq. scanner, auto select the best channel
- ◆ 3G-SDI & HDMI video transmission
- ◆ Receiver USB-C video capture output for PC/Mac
- ◆ Receiver with panel antenna built-in
- ◆ Up to 10,000ft/3km (Line-of-Sight) distance
- ◆ 1× Transmitter to Max 4× Receivers Multi-cast
- ◆ Fixed 32ms stable ultra low latency
- ◆ Metadata transmission and timecode trigger
- ◆ 2-pin LEMO DC power
- ◆ Tx NP-F battery power, Rx V-mount power



3km

CREW-V Max SDI&HDMI 3km Wireless



- ◆ KUWI 5.1-5.9GHz licence free wireless technology
- ◆ Built-in freq. scanner, auto select the best channel
- ◆ 3G-SDI & HDMI video transmission
- ◆ Receiver USB-C video capture output for PC/Mac
- ◆ Receiver with panel antenna built-in
- ◆ Up to 10,000ft/3km (Line-of-Sight) distance
- ◆ 1× Transmitter to Max 4× Receivers Multi-cast
- ◆ Fixed 32ms stable ultra low latency
- ◆ Metadata transmission and timecode trigger
- ◆ 2-pin LEMO DC power
- ◆ Tx V-mount male and female, Rx V-mount power



FLOW

Up to 22 Wireless Channels Simultaneously
5GHz HD Video Transmission For Live Event Productions

FLOW500
SDI&HDMI 500ft/150m Wireless System

- ◆ KUWI 5.1-5.9GHz Wireless Technology
- ◆ DFS comply, CE/FCC certificated
- ◆ 3GSDI & HDMI, with 3GSDI loop out
- ◆ 500ft/150m (Line-of-Sight) distance
- ◆ 32ms stable low latency
- ◆ 2-ch SDI&HDMI audio transmission
- ◆ OLED info and channel switching
- ◆ Built-in freq. scanner, auto jump to a best channel
- ◆ Stable connection and stronger wall-cross
- ◆ Support up to 22 pairs working in one location
- ◆ Multicast - 1 transmitter to unlimited receivers
- ◆ Wireless protocol & content double encryption
- ◆ NP-F DV battery plate for both Tx and Rx



The FLOW wireless Tx on all the stabilizer cameras.



14x FLOW wireless Rx for director monitoring, without interference to each other.

FLOW2000
SDI&HDMI 2000ft/600m Wireless System

- ◆ KUWI 5.1-5.9GHz Wireless Technology
- ◆ DFS comply, CE/FCC certificated
- ◆ 3GSDI & HDMI, with 3GSDI loop out
- ◆ 2000ft/600m (Line-of-Sight) distance
- ◆ 32ms stable low latency
- ◆ 2-ch SDI&HDMI audio transmission
- ◆ OLED info and channel switching
- ◆ Built-in freq. scanner, auto jump to a best channel
- ◆ Stable connection and stronger wall-cross
- ◆ Support up to 22 pairs working in one location
- ◆ Multicast - 1 transmitter to unlimited receivers
- ◆ Wireless protocol & content double encryption
- ◆ NP-F DV battery plate for both Tx and Rx



16x FLOW wireless Rx to OB Van production, without interference to each other.



The FLOW wireless Tx fits for different kinds of cameras by SDI or HDMI

Batteries

ENG/Cine Cameras Power
High Draw Lightings Power
Chargers, Power Adaptors
Multiple Power Solutions



The heavy duty cine battery, rubber corners drop-off proof, IP54 water proof and low temperature resistance.

Model: PB-R290S+, Page 27.



The B-mount batteries for ARRI ALEXA 35 and Trinity stabilizer system.

Model: BIVO-160, Page 21.



The high capacity 140Wh pocket V-mount battery on TILTA Khronos rig system, by Claudio Miranda.

Model: MINO-S140, Page 26.



The Canon BP-A type battery with USB-C, more models for SONY and Panasonic.

Model: LB-CA90C, Page 37.



The Floor Battery with 48V 1200W output for Skypanel S60 and more cine lightings.

Model: VOLTA-DC, Page 20.



The dual 98Wh pocket V-mount batteries hot-swap solution, uninterrupted power.

Model: PB-M98S, KA-M20S, Page 26.



The 70Wh ultra slim, light weight pocket V-mount battery on RED V-raptor and Ronin.

Model: MINO-S70, Page 26.



The 140Wh pocket V-mount battery on DJI wireless monitor system, light weight and large capacity, by DP Pan Luo.

Model: MINO-S140, Page 26.



The 99Wh pocket V-mount battery with 65W USB-C, D-tap, DC barrel, info display, and 150W constant high power.

Model: OMNI-99S, Page 25.



The 420Wh huge capacity V-mount battery with handheld size, working on cine camera, provides the longest lasting time.

Model: PB-C420S, Page 27.




VOLTA PRO

Modular Power Station

9kWh

Ultra Energy Density


- 3200W AC+DC Load
- 20°C Power Up
- IP54 Water Proof

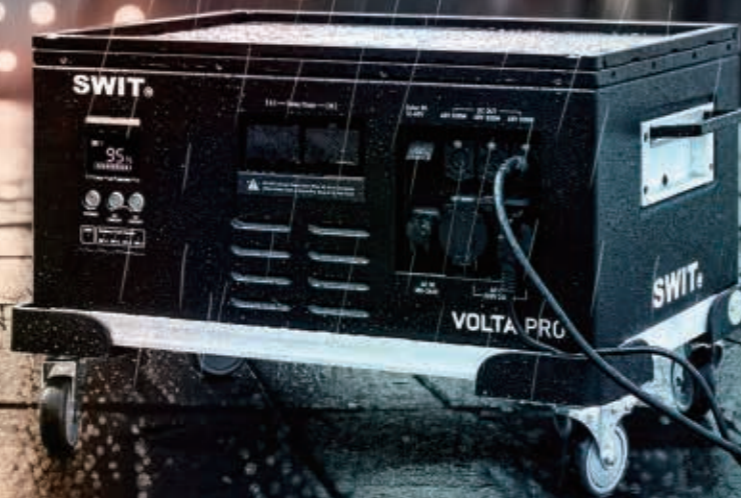

VOLTA-PRO

9kWh Modular Power Station

- ◆ 8890Wh Ternary Li-ion battery cells
- ◆ Modular replaced internal battery packs
- ◆ 600×400mm standard Eurobox size
- ◆ All metal durable heavy duty housing
- ◆ 3×DC 48V (Reg.) outputs, 800W each
- ◆ 2×AC 230V outputs, 2400W in total
- ◆ 3200W constant load, 4800W surge
- ◆ Built-in AC 180-264V 1500W fast charging
- ◆ Solar panel XT60 port 12-60V 800W charging
- ◆ Daisy Chain capacity extension, hot-swappable
- ◆ LCD display remaining time and power load
- ◆ Health indicators for each battery pack
- ◆ -20°C power up, low temp resistance
- ◆ IP54 rated rainproof certification

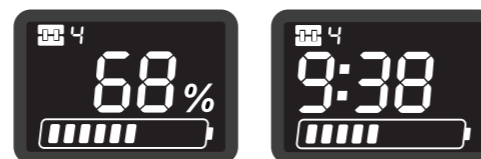

LCD Power Info Display
Power percentage, Remaining runtime



Modular Battery Packs
Convenient Service / Replacement
Plug & Play, with status indicators



Daisy Chain Extension
Hot-swap, infinite power supply

Standard Accessories




Optional Purchase




VOLTA-DC1600

Modular Add-on Floor Battery

- ◆ 1600Wh high power Li-ion battery cells
- ◆ Add on battery sections to expand capacity
- ◆ 2×DC 48V (Reg.) 1200W output
- ◆ 2×DC 24V (Reg.) 360W output
- ◆ 1×DC 15V (Reg.) 150W output
- ◆ 1×USB-C 65W power output
- ◆ Built-in AC 100-240V 500W fast charging
- ◆ Solar panel XT60 port 12-60V 400W charging
- ◆ LCD display remaining time and cycle times
- ◆ -20°C power up, low temp resistance
- ◆ Heavy duty housing with robber covers

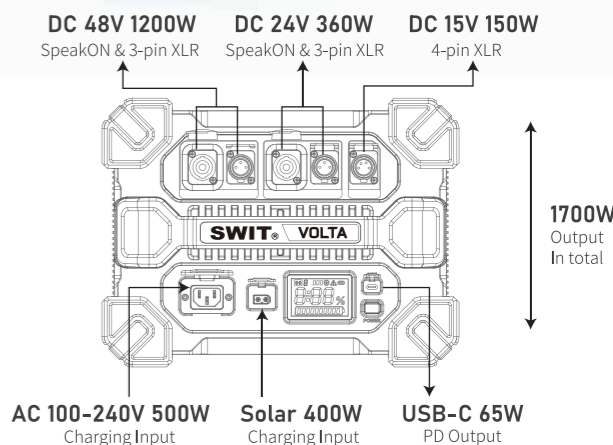

LCD Power Info Display

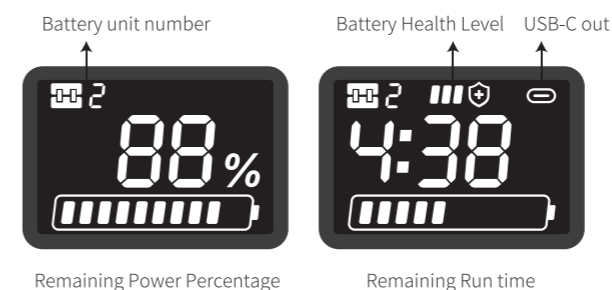

VA1600

VOLTA Add-on Battery Unit

- ◆ 1600Wh high power Li-ion battery cells
- ◆ Add onto VOLTA floor battery to expand capacity
- ◆ Max 8 battery units, 12.8kWh large capacity
- ◆ Easy screw and plug-in operation by users




DC Cables Provide

Select a cable for your light



Cable length: 2 meters

Model	Connect VOLTA	To Device	Max Load	Fit Lights
PA-701	3-pin XLR - 24V/48V	3-pin XLR	15A	ARRI Skypanel X/S60/S120/S60PRO, Orbiter, Litepanel
PA-705	SpeakON - 24V/48V	3-pin XLR	15A	Aputure LS600/LS1200, NOVA P300/P600, KinoFlo, etc
PA-702	3-pin XLR - 24V/48V	4-pin XLR	10A	ARRI L5-C, Prolights EclPanel TWCJR, etc
PA-706	SpeakON - 24V/48V	4-pin XLR	10A	
PA-703	3-pin XLR - 24V/48V	SpeakON NL4FX	15A	Nanlite Forza300/500, Dyno 650C, Lightstar Luxed4
PA-707	SpeakON - 24V/48V	SpeakON NL4FX	25A	
PA-704	3-pin XLR - 24V/48V	4-pin Ecomate	15A	Creamsource Vortex 4 / 8
PA-708	SpeakON - 24V/48V	4-pin Ecomate	25A	

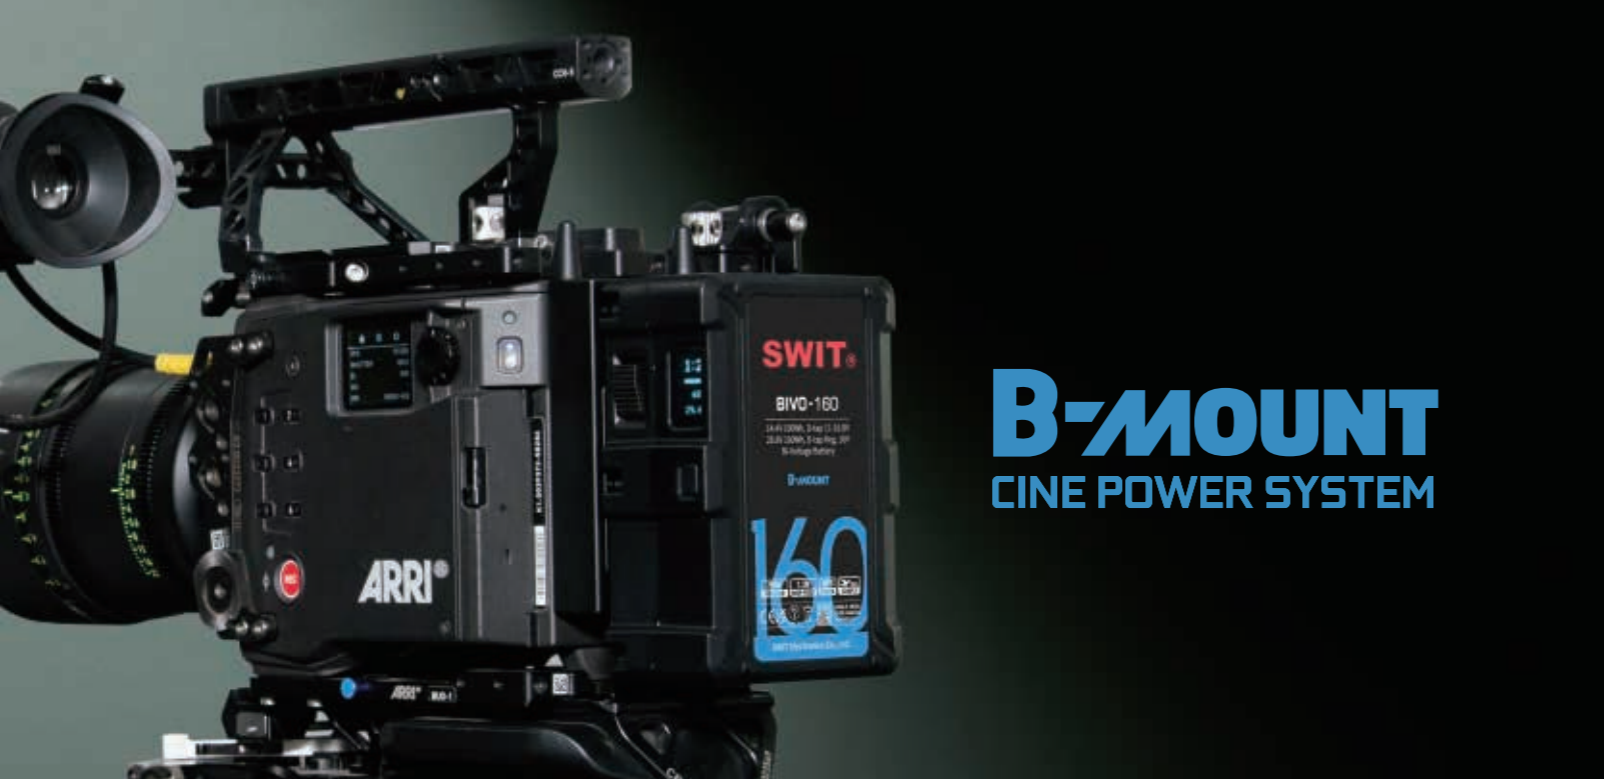

B-MOUNT CINE POWER SYSTEM



BIVO-98 98Wh 14.4v
28.8v

- ◆ 14.4V & 28.8V Bi-voltage
- ◆ 150W constant load
- ◆ 2x D-tap output sockets (14.4V status: D-tap 11-16.8V out) (28.8V status: D-tap Reg.16V out)
- ◆ Built-in LED torch
- ◆ 1.2m drop-off proof



BIVO-160 160Wh 14.4v
28.8v

- ◆ 14.4V & 28.8V Bi-voltage
- ◆ 200W constant load
- ◆ 33.6V 100W ultra fast charging
- ◆ 2x D-tap output sockets (14.4V status: D-tap 11-16.8V out) (28.8V status: D-tap Reg.16V out)
- ◆ OLED display remaining time
- ◆ Built-in LED torch, 1.2m drop-off proof



BIVO-200 196Wh 14.4v
28.8v

- ◆ 14.4V & 28.8V Bi-voltage
- ◆ 200W constant load
- ◆ 33.6V 100W ultra fast charging
- ◆ 2x D-tap output sockets (14.4V status: D-tap 11-16.8V out) (28.8V status: D-tap Reg.16V out)
- ◆ OLED display remaining time
- ◆ Built-in LED torch, 1.2m drop-off proof



BIVO-290 290Wh 14.4v
28.8v

- ◆ 14.4V & 28.8V Bi-voltage
- ◆ 250W constant load
- ◆ 33.6V 100W ultra fast charging
- ◆ 2x D-tap output sockets (14.4V status: D-tap 11-16.8V out) (28.8V status: D-tap Reg.16V out)
- ◆ OLED display remaining time
- ◆ Built-in LED torch, 1.2m drop-off proof



HB-A290B 290Wh 28.8v
USB-C 60W

- ◆ 28.8V high voltage
- ◆ 250W constant load
- ◆ 33.6V 100W ultra fast charging
- ◆ 2x D-tap Reg-16V outputs
- ◆ 1x USB-C 60W in & out
- ◆ 1x USB-A5V 2A out
- ◆ OLED display remaining time
- ◆ Built-in LED torch, 1.2m drop-off proof



**Keep Camera On
When Changing Battery**

KA-B30B B-mount to B-mount Hot Swap Plate

- ◆ Keep Camera On when changing battery
- ◆ 28V, 32Wh 3Ah battery cells inside
- ◆ 200W constant load, 2 min hot swap time
- ◆ 120 seconds countdown display
- ◆ 2×D-tap regulated 14V output
- ◆ 1×LEMO 2-pin regulated 14V output
- ◆ 22-33.6V 8-pin input for power station hotswap



[BIVO]
[ONLY]

S-3822B 2×50W Simultaneous B-mount Charger

- ◆ DC16.8V, 50W×2 simultaneous fast charging
- ◆ Charge B-mount batteries with 14.4V mode
- ◆ Compatible with SWIT BIVO series
- ◆ 1-ch 4-pin XLR DC 15V, 6A output
- ◆ LED charging indicators



PC-P461B 4×100W Ultra Fast B-mount Charger

- ◆ 4-ch simultaneous charging
- ◆ Charge B-mount batteries with 28.8V mode
- ◆ Compatible with both BIVO series and HB-A290B
- ◆ DC 33.6V 100W ultra fast charging ≥ 160Wh batteries
- ◆ DC 33.6V 44W charging < 160Wh batteries
- ◆ 3.5-inch color LCD info display
- ◆ Battery cycle times display
- ◆ Top large charging indicators




MATRIX-B8 8×100W Ultra Fast B-mount Wall Charger

- ◆ 8-ch simultaneous charging
- ◆ Charge B-mount batteries with 28.8V mode
- ◆ Compatible with both BIVO series and HB-A290B
- ◆ DC 33.6V 100W ultra fast charging ≥ 160Wh batteries
- ◆ DC 33.6V 44W charging < 160Wh batteries
- ◆ 2×3.5-inch color LCD info display
- ◆ LED charging indicators for each channel
- ◆ Wall mounting or 19-inch rack install




Provide Mounting Plate



Charger Mounting Plate Wall/Rack Plate

USB-C & Info Cine V-mount

■ OLED Power info display

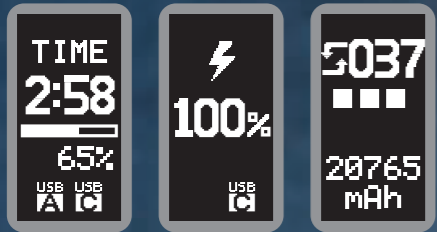

Remaining run time Charging percentage Cycle times Health level



The Intelligent 14.4V / 28.8V Bi-Voltage V-mount

RED V-RAPTOR XL
ARRI ALEXA LF/65
28.8V Lights & Monitors

Bi-Voltage V-mount



CIMO-98S 98Wh

- ◆ 150W, 12A constant load
- ◆ 2× D-tap out & Charging in
- ◆ 1× USB-A 5V/9V 2A out
- ◆ 1× USB-C 45W in 65W out
- ◆ 4-LED power indicator
- ◆ Built-in LED torch
- ◆ Strong 1.2m drop off proof

150 w
High Load

2×
D-tap

65 w
USB-C



CIMO-160S 160Wh

- ◆ 200W, 16A constant load
- ◆ 100W/6A ultra fast charging
- ◆ 2× D-tap out & Charging in
- ◆ 1× USB-A 5V/9V 2A out
- ◆ 1× USB-C 60W in 65W out
- ◆ OLED Remaining time display
- ◆ Built-in LED torch
- ◆ Strong 1.2m drop off proof

200 w
High Load

100 w
Fast Charge

2×
D-tap

65 w
USB-C



CIMO-D290S 14.4V/28.8V 290Wh V-mount

- ◆ 14.4V/28.8V Bi-voltage auto switch
- ◆ Standard V-mount interfaces
- ◆ Power 11-16.8V or 22-33.6V equipment
- ◆ Charge by regular 16.8V chargers
- ◆ 250W constant high load
- ◆ D-tap 11-16.8V regular voltage output
- ◆ 100W/6A ultra fast charging
- ◆ 8-LED remaining run time read
- ◆ Heavy Duty 1.5m drop-off proof

250 w
High Load

100 w
Fast Charge

2×
D-tap



Intelligent 11-16.8V and 22-33.6V switching by Magnetic Sticker

Standard V-mount pins, avoid misuse risk



Put the Magnetic Sticker on the marked position of any standard 3rd party V-mount plate.

When CIMO-D290S battery is attached to the V-mount plate with Magnetic Sticker, it will automatically switch to 28.8V (22-33.6V) power output.

When the battery is separated from the Magnetic Sticker, it will revert to the standard voltage mode of 14.4V (11-16.8V), and work as regular 14.4V battery to discharge and charge.

CIMO-200S 196Wh

- ◆ 200W, 16A constant load
- ◆ 100W/6A ultra fast charging
- ◆ 2× D-tap out & Charging in
- ◆ 1× USB-A 5V/9V 2A out
- ◆ 1× USB-C 60W in 65W out
- ◆ OLED Remaining time display
- ◆ Built-in LED torch
- ◆ Strong 1.2m drop off proof

200 w
High Load

100 w
Fast Charge

2×
D-tap

65 w
USB-C



CIMO-290S 290Wh

- ◆ 250W, 20A constant load
- ◆ 100W/6A ultra fast charging
- ◆ 2× D-tap out & Charging in
- ◆ 1× USB-A 5V/9V 2A out
- ◆ 1× USB-C 60W in 65W out
- ◆ OLED Remaining time display
- ◆ Built-in LED torch
- ◆ Strong 1.2m drop off proof

250 w
High Load

100 w
Fast Charge

2×
D-tap

65 w
USB-C



Pocket V-mount



LED Power info display

- Remaining run time
10-level power bar
- Charging status
Power percentage
- Battery health level



OMNI-50S 50Wh

- Pocket fit tiny V-mount battery
- 100W, 8A constant load
- 1× 14.4V D-tap out & Charging in
- 1× Reg. 8.4V/3A DC Barrel out
- 1× USB-A 5V/2A out
- 1× USB-C 30W in 65W out
- LED Remaining time display

100w
High Load

8.4v
DC Barrel

65w
USB-C




OMNI-99S 99Wh

- Pocket fit tiny V-mount battery
- 150W, 12A constant load
- 1× 14.4V D-tap out & Charging in
- 1× Reg. 8.4V/3A DC Barrel out
- 1× USB-A 5V/2A out
- 1× USB-C 48W in 65W out
- LED Remaining time display

150w
High Load

8.4v
DC Barrel

65w
USB-C

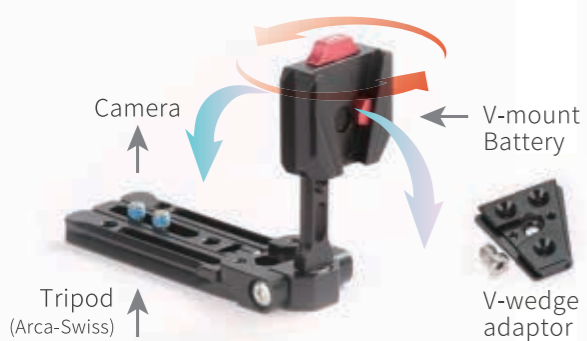

TA-T10S

Camera V-mount Adapting Plate

- Aluminum alloy light weight, 2kg load
- 210° tilt and 360° rotate V-mount head
- Arca Swiss standard base, tripod mount
- V-wedge quick release plate with 1/4 bolt
- Fold size 103×38×30mm



UC-2065

65W USB-C/A GaN Travel Charger

- Mini size 65W GaN charger
- 2× USB-C and 1× USB-A simultaneous output
- Charge camera batteries with USB-C ports
- Charge Laptops, Tablets and Smart devices
- US/EU/UK/AU interchangeable travel plugs

Pocket V-mount



MINO-S70 70Wh

- Tiny V-mount battery, Pocket fit
- 100W, 8A constant load
- 1× D-tap output & charging input
- 1× USB-A 5V/2A output
- 1× USB-C 35W input & 65W output
- 4-step LED power indicator
- SONY & RED power info
- Wire-Free internal technic

5v 2A
USB-A

65w
USB-C



MINO-S140 140Wh

- Tiny V-mount battery, Pocket fit
- 150W, 12A constant high load
- 1× D-tap output & charging input
- 1× USB-A 5V/2A output
- 1× USB-C 48W input & 65W output
- 4-step LED power indicator
- SONY & RED power info
- Wire-Free internal technic

150w
High Load

5v 2A
USB-A

65w
USB-C



MINO-S210 210Wh

- Tiny V-mount battery, Pocket fit
- 200W, 16A constant high load
- 1× D-tap output & charging input
- 1× USB-A 5V/2A output
- 1× USB-C 48W input & 65W output
- 100W/6A ultra fast charging
- 4-step LED power indicator
- SONY & RED power info
- Wire-Free internal technic

200w
High Load

100w
Fast Charge

5v 2A
USB-A

65w
USB-C



PB-M98S 98Wh

- Tiny V-mount battery, Pocket fit
- 150W, 12A constant high load
- 1× D-tap output & charging input
- 1× USB-A 5V/2A output
- 5-step LED power indicator
- SONY & RED power info
- Wire-Free internal technic

150w
High Load

5v 2A
USB-A



PB-M146S 146Wh

- Tiny V-mount battery, Pocket fit
- 150W, 12A constant high load
- 1× D-tap output & charging input
- 1× USB-A 5V/2A output
- 5-step LED power indicator
- SONY & RED power info
- Wire-Free internal technic

150w
High Load

5v 2A
USB-A



KA-M20S Hot-Swap

- Fit 2× PB-M or OMNI series Batteries
- Low power device: Hot swap mode
- High power device: High load mode
- Power indicators and hot swap indicators
- SONY & RED power info pass
- 2× D-tap power output
- Slim and light weight, balanced install



Heavy Duty V-mount



IP54 waterproof

1.5m drop-off proof



PB-R160S+
14.4V 160Wh V-mount



- Heavy Duty 1.5m drop-off proof
- IP54 certificated rainproof
- 200W, 16A constant high load
- 100W/6A ultra fast charging
- 8-LED remaining run time read
- SONY & RED SMBus power info
- 1× D-tap output & charging input



PB-R220S+
14.4V 220Wh V-mount



- Heavy Duty 1.5m drop-off proof
- IP54 certificated rainproof
- 200W, 16A constant high load
- 100W/6A ultra fast charging
- 8-LED remaining run time read
- SONY & RED SMBus power info
- 1× D-tap output & charging input



PB-R290S+
14.4V 290Wh V-mount



- Heavy Duty 1.5m drop-off proof
- IP54 certificated rainproof
- 250W, 20A constant high load
- 100W/6A ultra fast charging
- 8-LED remaining run time read
- SONY & RED SMBus power info
- 1× D-tap output & charging input



D-tap
x2

PB-C420S
14.4V 420Wh V-mount

- 250W/20A constant high load
- 100W/6A ultra fast charging
- D-tap power output and charging input x2
- SMBus power info for both SONY & RED
- 155×101×80mm, 2.07kg



500w
Load

HB-C420S
28.8V 420Wh V-mount

- 28.8V (22-33.6V) high voltage
- 500W constant high load, 650W peak load
- Charge by SWIT PC-P461S or MATRIX-S8
- 33.6V 100W ultra fast charging
- 155×101×80mm, 2.07kg

Info V-mount



D-tap
x2

USB-A
x1

PB-S98S 14.4V 98Wh

- 150W, 12A high constant load
- 2× D-tap output & charging input
- 1× USB-A 5V/2A output
- OLED remaining run time display
- SONY & RED SMBus power info



D-tap
x2

USB-A
x1

PB-S146S 14.4V 146Wh

- 200W, 16A high constant load
- 2× D-tap output & charging input
- 1× USB-A 5V/2A output
- OLED remaining run time display
- SONY & RED SMBus power info



D-tap
x4

USB-A
x1

PB-S220S 14.4V 220Wh

- 200W, 16A high constant load
- 4× D-tap output & charging input
- 1× USB-A 5V/2A output
- 100W/6A ultra fast charging
- OLED remaining run time display
- SONY & RED SMBus power info



D-tap
x4

USB-A
x1

PB-S290S 14.4V 290Wh

- 200W, 16A high constant load
- 4× D-tap output & charging input
- 1× USB-A 5V/2A output
- 100W/6A ultra fast charging
- OLED remaining run time display
- SONY & RED SMBus power info



**Keep Camera On
When Changing Battery**



15mm clamp included

KA-S30S
V-mount to V-mount Hot Swap Plate

- 14.4V 43Wh battery cells inside
- 200W constant load, at least 2min run time
- 120 seconds countdown display
- D-tapx2, 2-pin LEMO, USB-A output
- 12-16.8V 8-pin LEMO input for power station hotswap
- SONY & RED power info display
- Aluminum CNC unibody housing
- Provide 15mm rod clamp to install on rig



S-8192S
92+92Wh Separable V-mount Battery

- ◆ Separable design to comply with IATA regulations
- ◆ Divided into 2×92Wh parts to board airplane
- ◆ 100W, 8A constant load
- ◆ 1× D-tap output & charging input
- ◆ 4-level LED power indicator



S-8082S 95Wh

- 150w High Load
- D-tap ×1



S-8110S 146Wh

- 150w High Load
- D-tap ×1



S-8113S 160Wh

- 200w High Load
- 6A Fast Charge
- D-tap ×1



S-8180S 220Wh

- 200w High Load
- 6A Fast Charge
- D-tap ×1



S-8183S+ 270Wh

- 250w High Load
- 6A Fast Charge
- D-tap ×1

■ NP-1 style



S-8073N 73Wh

- 66w High Load
- D-tap ×2



S-7200S
V-Mount Plate with Clamp

- ◆ 25-45mm diameter fix
- ◆ 1×D-tap power output



S-7005A
Gold Mount to V-mount

- ◆ 1×D-tap power output



S-7005S
V-mount to Gold Mount

- ◆ 1×D-tap power output



PA-D104
D-tap 1 to 4 Distributor

- ◆ 1×D-tap power input
- ◆ 4×D-tap power output
- ◆ LCD display D-tap voltage
- ◆ 1/4" bolt for rig installation



KA-B21S
V-mount to B-mount Plate

- ◆ B-mount outputs V-battery voltage
- ◆ Use CIMO-D290S Bi-voltage battery to output 22-33.6V via B-mount



KA-S21B
B-mount to V-mount 28.8V

- ◆ B-mount input 21.6-33.6V
- ◆ V-mount out: 21.6-33.6V



BC-PD100
D-tap to USB-C 100W Bi-Directional

- ◆ Upgrade camera batteries to adapt USB-C
- ◆ USB-C PD 100W constant high load
- ◆ Charge camera batteries by USB-C chargers
- ◆ Power USB-C devices by camera batteries
- ◆ Provide 1/4" screw bolt for camera rig install



S-7101
D-tap to 4-pin XLR

- ◆ 10A power load
- ◆ 2 meters cable length



S-7104
D-tap to 5.5/2.1 Barrel

- ◆ 3A power load
- ◆ 1 meter cable length



S-7108
5.5/2.1 Barrel to Barrel

- ◆ 3A power load
- ◆ 1 meter cable length



S-7102
4-pin XLR Female to Male

- ◆ 10A power load
- ◆ 2 meters cable length




MATRIX-S8

8 × 100W 16.8V & 33.6V Ultra Fast V-mount Wall Charger

- ◆ 8-ch simultaneous charging both 14.4V and 28.8V batteries
- ◆ DC33.6V 100W charging SWIT 28.8V batteries
- ◆ DC16.8V 100W charging SWIT 14.4V and ≥160Wh batteries
- ◆ DC16.8V 50W charging for all other 14.4V batteries
- ◆ 2 × 3.5-inch color LCD info display
- ◆ LED charging indicators for each channel
- ◆ Wall mounting or 19-inch rack install



Provide Mounting Plate



Charger Mounting Plate Wall/Rack Plate




PC-P461S

4 × 100W 16.8V & 33.6V Ultra Fast V-mount Charger

- ◆ 4-ch simultaneous charging both 14.4V and 28.8V batteries
- ◆ DC33.6V 100W charging SWIT 28.8V batteries
- ◆ DC16.8V 100W charging SWIT 14.4V and ≥160Wh batteries
- ◆ DC16.8V 50W charging for all other 14.4V batteries
- ◆ 3.5-inch color LCD info display
- ◆ Top large charging indicators

Charging Info Display

Power percentage, Charging current, Voltage, Capacity, Cycle times, etc.

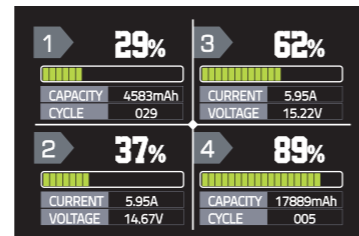

PC-P430S

4 × 50W Simultaneous Fast V-mount Charger

- ◆ DC16.8V, 50W × 4 simultaneous fast charging
- ◆ 2-ch 4-pin XLR DC15V, 6A × 2 simultaneous output
- ◆ LED charging indicators



S-3822S

2 × 50W Simultaneous Fast V-mount Charger

- ◆ DC16.8V, 50W × 2 simultaneous fast charging
- ◆ 1-ch 4-pin XLR DC 15V, 6A output
- ◆ LED charging indicators



SC-302S

2 × 33W Simultaneous V-mount Charger

- ◆ DC 16.8V, 33W × 2 simultaneous charging
- ◆ LED charging indicators



S-3812S

2 × 100W Simultaneous Ultra Fast V-mount Charger

- ◆ 2-ch simultaneous charging
- ◆ DC16.8V 100W/6A fast charging for SWIT ≥160Wh batteries
- ◆ DC16.8V 50W/3A charging for other batteries
- ◆ AC to 4-pin XLR 200W/12A adapting output
- ◆ Battery to 4-pin XLR 200W/12A adapting output
- ◆ LCD display Charging/Adapting info display



PC-U130B/B2

50W Ultra Portable D-tap Travel Charger

- ◆ 16.8V, 50W/ 3A fast charging
- ◆ Charging batteries via D-tap socket

PC-U130B: Single D-tap charging
PC-U130B2: Dual D-tap heads simultaneous charging



D-tap
×2

USB-A
×1

PB-S98A 98Wh Gold Mount Battery

- ◆ 150W, 12A high constant load
- ◆ 2× D-tap output & charging input
- ◆ 1× USB-A 5V/2A output
- ◆ OLED remaining run time display
- ◆ Antonbauer charger compatible



D-tap
×2

USB-A
×1

PB-S146A 146Wh Gold Mount Battery

- ◆ 200W, 16A high constant load
- ◆ 2× D-tap output & charging input
- ◆ 1× USB-A 5V/2A output
- ◆ OLED remaining run time display
- ◆ Antonbauer charger compatible



D-tap
×4

USB-A
×1

PB-S220A 220Wh Gold Mount Battery

- ◆ 200W, 16A high constant load
- ◆ 2× D-tap output & charging input
- ◆ 1× USB-A 5V/2A output
- ◆ OLED remaining run time display
- ◆ Antonbauer charger compatible

Classic Style



200W
High Load

6A
Fast Charge

D-tap
×1

S-8113A 160Wh Gold Mount



250W
High Load

6A
Fast Charge


D-tap
×1

S-8183A+ 270Wh Gold Mount



MATRIX-A8 8×100W Ultra Fast Gold Mount Wall Charger

- ◆ 8-ch simultaneous charging
- ◆ DC16.8V 100W charging SWIT ≥160Wh batteries
- ◆ DC16.8V 50W charging all other batteries
- ◆ 2×3.5-inch color LCD info display
- ◆ LED charging indicators for each channel
- ◆ Wall mounting or 19-inch rack install

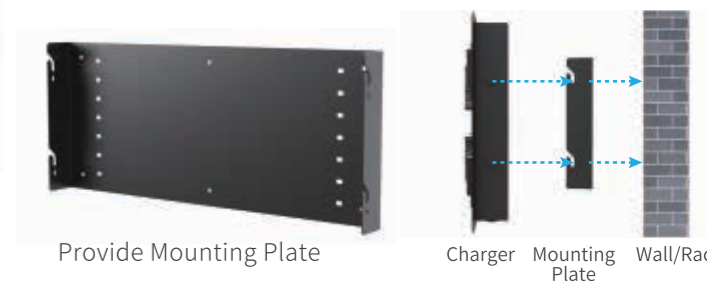

PC-P461A 4×100W Ultra Fast Gold Mount Charger

- ◆ 4-ch simultaneous charging
- ◆ DC16.8V 100W charging SWIT ≥160Wh batteries
- ◆ DC16.8V 50W charging for all other batteries
- ◆ 3.5-inch color LCD info display
- ◆ Top large charging indicators



S-3822A 2×50W Simultaneous Gold Mount Charger

- ◆ DC16.8V, 50W×2 simultaneous fast charging
- ◆ 1-ch 4-pin XLR DC 15V, 6A output
- ◆ LED charging indicators

POWERCELL

Batteries with Premium Cells



USB-C Charging



4-LED Indicators



NP-FZ100

- ◆ SONY NP-FZ100 Type
- ◆ 7.2V 2200mAh / 16Wh
- ◆ USB-C 5V charging in
- ◆ 4-LED power indicator

For SONY cameras:

FX2 / FX3 / FX3A / FX30
A7C / A7C II / A7S III /
A7 III / A7 IV / A7 V
A7R III / A7R IV / A7R V
A1 / A1 II / A9 / A9 II / A9 III
A6600 / A6700 / ZV-E1



LP-E6P

- ◆ Canon new LP-E6P type
- ◆ Compatible E6/E6N/E6NH
- ◆ 7.2V 2200mAh / 16Wh
- ◆ USB-C 5V charging in
- ◆ 4-LED power indicator

For Canon cameras:

EOS C50 / R / R5 / R5M2
R6 / R6M2 / R6M3 / R7 / R7M2
5DM2 / 5DM3 / 5DM4 / 5DS / 5DS R
6D / 6DM2 / 7D / 7DM2
60D / 70D / 80D / 90D
(ZCAM) E2C / E2N
(BMD) BMPCC 4K



EN-EL15c

- ◆ Nikon EN-EL15c Type
- ◆ Compatible EL15/15a/15b
- ◆ 7.2V 2200mAh / 16Wh
- ◆ USB-C 5V charging in
- ◆ 4-LED power indicator

For Nikon cameras:

ZR / Z5 / Z5 II / Z6 / Z6 II / Z6 III
Z7 / Z7 II / Z8 / Zf
D500 / D610 / D750 / D780 / D810
D810A / D850 / D7200 / D7500
MB-D10/11/12/14/15/16/17/18



NP-W235

- ◆ Fujifilm NP-W235 Type
- ◆ 7.2V 2200mAh / 16Wh
- ◆ USB-C 5V charging in
- ◆ 4-LED power indicator

For Fujifilm cameras:

GFX ETERNA 55
GFX100 II / 100S / 100S II
GFX 100RF / 50S II
X-H2 / X-H2S
X-T4 / X-T5 / X-S20



DB-FZ100

USB-C to SONY NP-FZ100 Dummy Battery

- ◆ USB-C 9V/12V/15V/20V input
- ◆ NP-FZ100 Pins 8.4V/3A output



DB-E6P

USB-C to Canon LP-E6P Dummy Battery

- ◆ USB-C 9V/12V/15V/20V input
- ◆ LP-E6P Pins 8.4V/3A output

SONY NP-F Type



25W
USB-C
12V
D-tap

LB-SF65C 65Wh

- ◆ D-tap 12V(Reg.) 20W output
- ◆ USB-C 25W input & output
- ◆ 4-level LED power indicator



Barrel
DC out

S-8975 75Wh

- ◆ Display remaining power in viewfinder
- ◆ 7.2V DC barrel output socket
- ◆ 4-level LED power indicator



Barrel
DC out

S-8972 47Wh



S-8970 47Wh

- ◆ SONY NP-F970 original size
- ◆ Display remaining power



S-8770 31Wh

- ◆ SONY NP-F770 original size
- ◆ Display remaining power



S-8570 24Wh

- ◆ SONY NP-F570 original size
- ◆ Display remaining power
- ◆ Fit ARRI Hi-5 / ZMU4 hand units



DB-F570

USB-C to NP-F Dummy Battery

- ◆ USB-C 9V/12V/15V/20V input
- ◆ NP-F Pins 8.4V/3A output



DB-DF570R

Dual-sided NP-F Dummy Battery

- ◆ D-tap 9-18V input with voltage display
- ◆ Dual-sided NP-F pins 8.4V/8A output
- ◆ 270° rotatable dummy NP-F
- ◆ USB-C 5V/9V/12V 3A output



KA-F20S

V-mount to NP-F 8.4V Plate

- ◆ V-mount 12-16.8V input
- ◆ NP-F pins 8.4V/4A output

SONY BP-U Type



45W
USB-C
D-tap
DC out

LB-SU90C 90Wh

- ◆ For SONY PXW-Z200/280/380, X280, FX6/9 etc
- ◆ Display remaining power in viewfinder
- ◆ D-tap socket output & charging input
- ◆ USB-C 45W input & 45W output
- ◆ 4-level LED power indicator



5V/2A
USB-A
D-tap
DC out

LB-SU98 98Wh

- ◆ For SONY PXW-Z200/280/380, X280, FX6/9 etc
- ◆ Display remaining power in viewfinder
- ◆ D-tap socket output & charging input
- ◆ USB-A 5V/2A output
- ◆ 4-level LED power indicator



5V/2A
USB-A
D-tap
DC out

LB-SU75 75Wh

Panasonic VBR59 Type



25W
USB-C
12V
D-tap

LB-PD65C 65Wh

- ◆ Panasonic VBD/VBR compatible
- ◆ For AG-DVX200, PX270/UPX360 etc
- ◆ D-tap 12V(Reg.) 20W output
- ◆ USB-C 25W input & output
- ◆ 4-level LED power indicator



5V/1A
USB-A
Barrel
DC out

S-8D98 70Wh

- ◆ Panasonic VBD/VBR compatible
- ◆ For AG-DVX200, PX270/UPX360 etc
- ◆ 7.2V DC barrel output socket
- ◆ USB-A 5V/1A output
- ◆ 4-level LED power indicator



5V/1A
USB-A
Barrel
DC out

S-8D58 43Wh

- ◆ Panasonic VBD/VBR compatible
- ◆ For AG-DVX200, PX270/UPX360 etc
- ◆ 7.2V DC barrel output socket
- ◆ USB-A 5V/1A output
- ◆ 4-level LED power indicator

Canon BP-A Type



45W
USB-C
D-tap
DC out

LB-CA90C 90Wh

- ◆ Canon BP-A30/A60 compatible
- ◆ For EOS-C70, C80, C200, C300M2, C400, C500M2
- ◆ For XF605, XF705
- ◆ D-tap socket output & charging input
- ◆ USB-C 45W input & 45W output
- ◆ 4-level LED power indicator

LC-D421

4-ch Simultaneous Multi-type Charger

- ◆ 4-ch simultaneous charging
- ◆ 2A fast charging current per channel
- ◆ Snap-on exchangeable DV battery plates
- ◆ Mixed installation of different DV plates



KA-C10U/F/D

Optional exchangeable plates

Plate Model	Compatible Batteries
KA-C10U	SWIT LB-SU90C/SU75/SU98, SONY BP-U30/60
KA-C10F	SWIT LB-SF65C/S-8975/8972/8970/8770/8570, SONY NP-F970/770
KA-C10D	SWIT LB-PD65C/S-8D98/8D58, Panasonic VBR59/VBD58/D54

SONY BP-U Type



S-3602U

2-ch BP-U Type Charger

- ◆ Charge SONY BP-U type batteries
- ◆ Charge SWIT LB-SU90C/SU98/SU75
- ◆ 2A×2 simultaneous charging
- ◆ 1× 12.7V/3.5A AC-DC adapting out

SONY NP-F Type



S-3602F

2-ch NP-F Type Charger

- ◆ Charge SONY NP-F type batteries
- ◆ Charge SWIT LB-SF65C/S-8975/8972
- ◆ Charge SWIT S-8970/8770/8570
- ◆ 1.8A×2 simultaneous charging
- ◆ 2× 8.4V/3.5A AC-DC adapting out

Panasonic VBR59 Type




S-3602D

2-ch VBR Type Charger

- ◆ Charge Panasonic VBR type batteries
- ◆ Charge SWIT LB-PD65C, S-8D98/8D58
- ◆ 1.2A×2 simultaneous charging
- ◆ 2× 8.4V/2.2A AC-DC adapting out

Lightings

ENG On-camera Lights
On-location Production Lights
Broadcast Studio Light Solutions
Event/Stage Lighting Setup

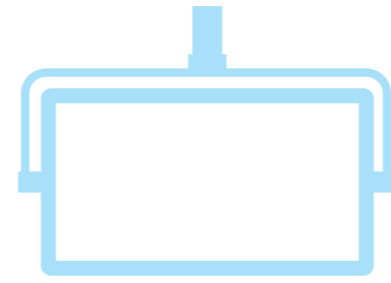

The 150W Bi-color Studio Panel LED lights are installed inside the Catedrala Patriarhala in Bucharest. It has passed the IEC 62471 Photobiological Safety certificate. While illuminating the environment, it effectively protects the church frescoes.

Model: PL-S150D, Page 51.



The 100W Bi-color flexible LED light for portable carrying and light weight setup.

Model: S-2610, Page 42.



The 60W Bi-color ultra slim portable LED panel produces natural soft light output.

Model: PL-E60D, Page 46.



The 60W Bi-color COB fresnel LED, light weight for overhead studio setup.

Model: FL-C60D, Page 53.



The 30W Bi-color COB news light for ENG camera setup.

Model: S-2060, Page 41.



The 100W RGBW mini panel for low ceiling studio setup, fanless.

Model: CL-M100C, Page 49.



The broadcast studio lighting system setup with 100W Bi-color LED panel lights, provides with all accessories for installation.

Model: CL-100D, Page 50.



The 2:1 size 100W RGBW ultra slim LED panel in film production.

Model: VANGO-100, Page 45.



The 400W ultra bright bi-color fresnel LED light setup in virtual studio at Chulalongkorn University, Thailand.

Model: FL-C400D, Page 54.





S-2060
30W Bi-color COB On-camera LED Light

- ◆ COB LED Single shadow, soft, glareless
- ◆ CRI Ra 96, TLCI 99
- ◆ 30W, 1500Lux @ 1 meter, dimmable
- ◆ Fresnel lens, raise to 5000Lux@1m
- ◆ 2800K-6000K continuously adjustable
- ◆ 6-17V DC cable input
- ◆ Glass Fiber strong and durable housing
- ◆ Screw and cold shoe mount



S-2041
23W COB On-camera LED Light

- ◆ COB LED Single shadow, soft, glareless
- ◆ 23W, 1800Lux @ 1 meter, dimmable
- ◆ 5000K color temperature, with 5600K&3200K filters
- ◆ 6-17V DC cable input
- ◆ S-7004 series interchangeable multi-type DV plates
- ◆ Screw and cold shoe mount



S-2070
13W COB On-camera LED Light

- ◆ COB LED Single shadow, soft, glareless
- ◆ Compact size for DV camcorders
- ◆ 13W, 1100Lux @ 1 meter, dimmable
- ◆ 5000K color temperature, with 5600K&3200K filters
- ◆ 6-17V DC cable input
- ◆ S-7004 series interchangeable multi-type DV plates
- ◆ Glass Fiber strong and durable housing
- ◆ Screw and cold shoe mount



S-2241
20W Bi-color SMD On-camera LED Light

- ◆ 153pcs ultra bright Surface mounted LEDs
- ◆ 20W power, 640Lux @ 1 meter center
- ◆ 3200K-5600K continuously adjustable
- ◆ 10%-100% flick-free dimming
- ◆ CRI Ra 93, TLCI 97
- ◆ Magnetic diffuser with organic light diffusion agent
- ◆ 6-17V DC cable input
- ◆ Interchangeable S-7004 series various DV plates



S-2610
100W Bi-color Flexible LED Light

- ◆ 504pcs SMD LEDs 600x460mm flexible light head
- ◆ 100W power 2400Lux @ 1 meter
- ◆ 3000K-5600K continuously adjustable
- ◆ 0-100% flick-free dimming
- ◆ CRI Ra 97, TLCI 97
- ◆ DC 11-17V input and V-mount battery power

Standard Package



Optional Purchase



S-2620
50W Bi-color Flexible LED Light

- ◆ 280pcs SMD LEDs 455x315mm flexible light head
- ◆ 50W power 1200Lux @ 1 meter
- ◆ 3000K-5600K continuously adjustable
- ◆ 0-100% flick-free dimming
- ◆ CRI Ra 97, TLCI 97
- ◆ DC 11-17V input and V-mount battery power

Standard Package



Optional Purchase



S-2630
150W Bi-color Flexible LED Light

- ◆ 756pcs SMD LEDs 600x600mm flexible light head
- ◆ 150W power 3900Lux @ 1 meter
- ◆ 3000K-5600K continuously adjustable
- ◆ 0-100% flick-free dimming
- ◆ CRI Ra 97, TLCI 97
- ◆ DC 11-17V input and V-mount battery power

Standard Package



Optional Purchase





CL-40D 40W Ultra Portable Bi-color Panel LED Light

- ◆ 288pcs ultra bright long-life SMD LEDs
- ◆ 20×20cm ultra portable size
- ◆ 40W 2700K LED + 40W 6500K LED
- ◆ 2700K-6500K continuously adjustable
- ◆ Constant 40W output at any color temp
- ◆ 4600Lux @ 0.5 meters with diffuser
- ◆ 480FPS slow-motion capture flick-free
- ◆ IEC 62471 Photobiological Safety certificate
- ◆ Fanless, absolutely silent
- ◆ LCD display color temp and dimmer
- ◆ CRI Ra 98, TLCI 99, SSI(D55) 75
- ◆ USB-C and DC barrel 15V power input
- ◆ On-board V-mount battery plate
- ◆ Provide 2-light interview kit

Package Option:



Single light package



2-Light Interview Kit with carrying bag and light stands



CL-60D 60W Bi-color SMD Panel LED Light

- ◆ 900pcs ultra bright long-life SMD LEDs
- ◆ Half-peak 65° wide beam angle
- ◆ 60W power, 2000Lux @ 1meter
- ◆ IEC 62471 Photobiological Safety certificate
- ◆ 2700K-6500K continuously adjustable
- ◆ CRI Ra 98, TLCI 99
- ◆ DMX512 controlled color and dimmer
- ◆ USB power out for wireless DMX Rx
- ◆ LCD display color and dimmer value
- ◆ Power by V-mount battery or AC-DC adaptor
- ◆ 4-leaf metal barn doors and Yoke bracket

Optional Accessories:



LA-BX60 Diffusing Box

LA-G60 40° honeycomb

LA-PO60 Pole Operated Yoke



CL-120D 120W Bi-color SMD Panel LED Light

- ◆ 1800pcs ultra bright long-life SMD LEDs
- ◆ Half-peak 65° wide beam angle
- ◆ 120W power, 3700Lux @ 1meter
- ◆ IEC 62471 Photobiological Safety certificate
- ◆ 2700K-6500K continuously adjustable
- ◆ CRI Ra 98, TLCI 99
- ◆ DMX512 controlled color and dimmer
- ◆ USB power out for wireless DMX Rx
- ◆ LCD display color and dimmer value
- ◆ Power by V-mount battery or AC-DC adaptor
- ◆ 4-leaf metal barn doors and Yoke bracket

Optional Accessories:



LA-BX120 Diffusing Box

LA-G120 45° honeycomb

LA-PO120 Pole Operated Yoke



VANGO-70
70W Ultra Slim RGBW Panel LED Light

- ♦ Edge mounted LEDs, 21mm ultra slim
- ♦ 1×1' size, 70W power, 1500Lux @ 1meter
- ♦ IEC 62471 Photobiological Safety certificate
- ♦ Patented Time-Division drive, 100% RGB power
- ♦ CCT / HSI / RGB / CIE / GEL / EFF color mode
- ♦ Built-in 20x Rosco and 20x LEE GELS
- ♦ 2800K-10000K, G/M ±1.00 adjustment
- ♦ CRI Ra 96, TLCI 93
- ♦ 3.5-inch color LCD visualized color pick
- ♦ DMX512 channels settings for various modes
- ♦ IOS/Android APP control
- ♦ V/Gold mount battery and 4-pin XLR DC IN
- ♦ With barn door kit and optional honeycomb




PL-E60D
60W Bi-color Soft Panel LED Light

- ♦ Edge mounted LEDs, 21mm ultra slim
- ♦ 1×1' size, 60W power, 1500Lux @ 1meter
- ♦ IEC 62471 Photobiological Safety certificate
- ♦ 0-100% flick-free dimming
- ♦ 2700K-6500K continuously adjust
- ♦ CRI Ra 98, TLCI 99
- ♦ DMX512 and Interaction control
- ♦ USB power out for wireless DMX Rx
- ♦ V/Gold mount battery and 4-pin DC IN
- ♦ All metal housing and 21mm ultra slim
- ♦ Optional barn door & honeycomb



VANGO-100
100W Ultra Slim RGBW Panel LED Light

- ♦ Edge mounted LEDs, 21mm ultra slim
- ♦ 2×1' size, 100W power, 2200Lux @ 1meter
- ♦ IEC 62471 Photobiological Safety certificate
- ♦ Patented Time-Division drive, 100% RGB power
- ♦ CCT / HSI / RGB / CIE / GEL / EFF color mode
- ♦ Built-in 20x Rosco and 20x LEE GELS
- ♦ 2800K-10000K, G/M ±1.00 adjustment
- ♦ CRI Ra 96, TLCI 93
- ♦ 3.5-inch color LCD visualized color pick
- ♦ DMX512 channels settings for various modes
- ♦ IOS/Android APP control
- ♦ V/Gold mount battery and 4-pin XLR DC IN
- ♦ With barn door kit and optional honeycomb

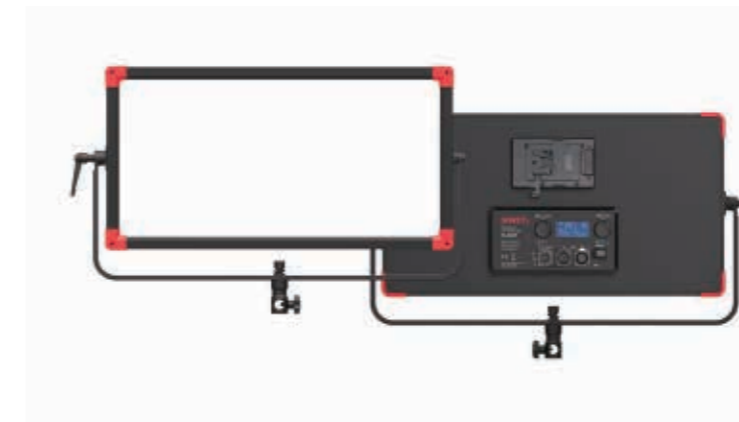

PL-E90D
90W Bi-color Soft Panel LED Light

- ♦ Edge mounted LEDs, 21mm ultra slim
- ♦ 2×1' size, 90W power, 2200Lux @ 1meter
- ♦ IEC 62471 Photobiological Safety certificate
- ♦ 0-100% flick-free dimming
- ♦ 2700K-6500K continuously adjust
- ♦ CRI Ra 98, TLCI 99
- ♦ DMX512 and Interaction control
- ♦ USB power out for wireless DMX Rx
- ♦ V/Gold mount battery and 4-pin DC IN
- ♦ All metal housing and 21mm ultra slim
- ♦ Optional barn door & honeycomb



VANGO-100L
100W Ultra Slim Long Ratio RGBW Panel LED Light

- ♦ 0.5×3' long ratio slim panel light
- ♦ Edge mounted LEDs, 21mm ultra slim
- ♦ 100W power, 1800Lux @ 1meter
- ♦ IEC 62471 Photobiological Safety certificate
- ♦ Patented Time-Division drive, 100% RGB power
- ♦ CCT / HSI / RGB / CIE / GEL / EFF color mode
- ♦ Built-in 20x Rosco and 20x LEE GELS
- ♦ 2800K-10000K, G/M ±1.00 adjustment
- ♦ CRI Ra 96, TLCI 93
- ♦ 3.5-inch color LCD visualized color pick
- ♦ DMX512 channels settings for various modes
- ♦ IOS/Android APP control
- ♦ V/Gold mount battery and 4-pin XLR DC IN
- ♦ With barn door kit and ball head light stand mount



PL-E90L
90W Bi-color Long Ratio Soft Panel LED Light

- ♦ 0.5×3' long ratio, 21mm ultra slim panel light
- ♦ 480pcs edge mounted SMD-LEDs
- ♦ 90W power, 2000Lux @ 1meter
- ♦ IEC 62471 Photobiological Safety certificate
- ♦ 0-100% flick-free dimming
- ♦ 2700K-6500K continuously adjust
- ♦ CRI Ra 99, TLCI 99
- ♦ DMX512 control and Interaction control
- ♦ USB power out for wireless DMX Rx
- ♦ Heavy load ball head light stand mount
- ♦ With 2-leaf metal barn doors
- ♦ V/Gold mount battery and 4-pin XLR DC IN



400W

MONET-400 400W RGBWW Pro Panel LED Light

- ◆ 400W RGB + 400W Warm + 400W Cold LEDs
- ◆ Patented Time-Division drive, 100% RGB power
- ◆ 1×1' size, 11500Lux @ 1meter
- ◆ IEC 62471 Photobiological Safety certificate
- ◆ CCT / HSI / RGB / CIE / GEL / EFF color mode
- ◆ 2800K-10000K, G/M ±1.00 adjustment
- ◆ CRI Ra 95, TLCI 95, SSI(D55) 75
- ◆ DMX512 channels settings for various modes
- ◆ Built-in Lumenradio CRMX Receiver
- ◆ EtherCON Art-Net IP control
- ◆ IOS/Android APP control
- ◆ PowerCON TRUE1 AC and 3-pin DC48V power input

Optional Accessories:



LA-BX400 Diffusing Box

LA-G400 40° honeycomb

LA-POM400 Pole Operated Yoke



700W

MONET-700 700W RGBWW Pro Panel LED Light

- ◆ 700W RGB + 700W Warm + 700W Cold LEDs
- ◆ Patented Time-Division drive, 100% RGB power
- ◆ 2×1' size, 20000Lux @ 1meter
- ◆ IEC 62471 Photobiological Safety certificate
- ◆ CCT / HSI / RGB / CIE / GEL / EFF color mode
- ◆ 2800K-10000K, G/M ±1.00 adjustment
- ◆ CRI Ra 95, TLCI 95, SSI(D55) 75
- ◆ DMX512 channels settings for various modes
- ◆ Built-in Lumenradio CRMX Receiver
- ◆ EtherCON Art-Net IP control
- ◆ IOS/Android APP control
- ◆ PowerCON TRUE1 AC and 3-pin DC48V power input

Optional Accessories:



LA-BX700 Diffusing Box

LA-G700 40° honeycomb

LA-POM700 Pole Operated Yoke

Infinite Creation Packed in Your Palm

MINI-150B 150W Mini Bowens



MINI-150B 150W Mini Bowens Bi-color COB-LED Light

- ◆ 150W Warm White LEDs and 150W Cold White LEDs
- ◆ Mini Bowens mount compact size 103×103×124mm
- ◆ 24000Lux @ 1m ultra bright with standard reflector
- ◆ Support Fan-Off silent mode
- ◆ 0-100% Smooth flick-free dimming
- ◆ Linear, Log, Exponential, S- dimming curves
- ◆ 2700K-6500K continuous adjustment
- ◆ CRI Ra 98, TLCI 98, SSI(D55) 73
- ◆ Built-in multiple light effects
- ◆ IOS/Android Bluetooth APP control
- ◆ USB-C and V-mount battery power
- ◆ Support firmware update via USB-C

150W



Optional Accessories:



1/4-inch tilt head Baby pin Receiver

Mini Bowens Reflector with Diffusing Cover

Mini Bowens φ45cm Quick-open Softbox

Mini to Standard Bowens Adaptor

AC to USB-C 150W Power Adaptor (2m)



CL-M100D Mini 100W Bi-color Studio Panel LED

- ◆ 1×0.5' mini size for low ceiling studio install
- ◆ 576pcs ultra bright long-life SMD LEDs
- ◆ 100W power, 3400Lux @ 1meter ultra bright
- ◆ Fanless, absolute silent
- ◆ IEC 62471 Photobiological Safety certificate
- ◆ 2700K-6500K continuously adjustable
- ◆ 0-100% flick-free dimming
- ◆ CRI Ra 98, TLCI 99, SSI (D55) 73
- ◆ DMX512 controlled color and dimmer
- ◆ USB power out for wireless DMX receiver
- ◆ LCD display color and dimmer value
- ◆ PowerCON TRUE1 AC in and loop out
- ◆ 4-pin XLR DC 11-17V input
- ◆ All-metal housing with 4-leaf barn doors

Optional Accessories:



LA-GM100 45° honeycomb LA-POM100 Pole Operated Yoke



CL-M100C Mini 100W RGBW Studio Panel LED

- ◆ 1×0.5' mini size for low ceiling studio install
- ◆ 170pcs RGB + 340pcs White SMD-LEDs
- ◆ 100W power, 3000Lux @ 1meter
- ◆ Fanless, absolute silent
- ◆ IEC 62471 Photobiological Safety certificate
- ◆ Patented Time-Division drive, 100% RGB power
- ◆ CCT / HSI / RGB / CIE / GEL / EFF color mode
- ◆ 2800K-10000K, G/M ±1.00 adjustment
- ◆ CRI Ra 96, TLCI 93
- ◆ 3.5-inch color LCD visualized operation
- ◆ DMX512 channels settings for various modes
- ◆ USB power out for wireless DMX receiver
- ◆ IOS/Android APP control
- ◆ PowerCON TRUE1 AC in and loop out
- ◆ All-metal housing with 4-leaf barn doors

Optional Accessories:



LA-GM100 45° honeycomb LA-POM100 Pole Operated Yoke



CL-100D 100W Bi-color Studio Panel LED Light

- ◆ 1440pcs ultra bright long-life SMD LEDs
- ◆ Half-peak 65° wide beam angle
- ◆ 100W power, 3300Lux @ 1meter, Fanless
- ◆ IEC 62471 Photobiological Safety certificate
- ◆ 0-100% flick-free dimming
- ◆ 2700K-6500K continuously adjust
- ◆ CRI Ra 97, TLCI 99, SSI (D55) 75
- ◆ DMX512 controlled color and dimmer
- ◆ USB power out for wireless DMX Rx
- ◆ LCD display color and dimmer value
- ◆ PowerCON TRUE1 AC in and loop out
- ◆ 4-leaf metal barn doors and Yoke bracket

Optional Accessories:



LA-G100 40° honeycomb LA-PO100 Pole Operated Yoke



PL-E90LH 90W Bi-color Long Ratio Studio Panel

- ◆ 3×0.5' long ratio for low ceiling studio install
- ◆ Only 21mm ultra slim, fanless
- ◆ 90W power, 2000Lux @ 1meter
- ◆ IEC 62471 Photobiological Safety certificate
- ◆ 0-100% flick-free dimming
- ◆ 2700K-6500K continuously adjust
- ◆ CRI Ra 99, TLCI 99
- ◆ DMX512 control and Interaction control
- ◆ USB power out for wireless DMX Rx
- ◆ V/Gold mount battery and 4-pin XLR DC IN



VANGO-100LH 100W RGBW Long Ratio Studio Panel

- ◆ 3×0.5' long ratio for low ceiling studio install
- ◆ Only 21mm ultra slim, fanless
- ◆ 100W power, 1800Lux @ 1meter
- ◆ IEC 62471 Photobiological Safety certificate
- ◆ Patented Time-Division drive, 100% RGB power
- ◆ CCT / HSI / RGB / CIE / GEL / EFF color mode
- ◆ 2800K-10000K, G/M ±1.00 adjustment
- ◆ CRI Ra 96, TLCI 93
- ◆ DMX512 channels settings for various modes
- ◆ USB power out for wireless DMX Rx
- ◆ IOS/Android APP control
- ◆ V/Gold mount battery and 4-pin XLR DC IN





150W

PL-S150D
150W Bi-color SMD Panel LED Light

- ◆ 1152pcs ultra bright long-life SMD LEDs
- ◆ 2×1' size, 150W, 5500Lux @ 1meter ultra bright
- ◆ Fanless, absolute silent
- ◆ IEC 62471 Photobiological Safety certificate
- ◆ 2700K-6500K continuously adjustable
- ◆ 0-100% Smooth non-linear flick-free dimming
- ◆ CRI Ra 97, TLCI 99, SSI (D55) 73
- ◆ DMX512 controlled color and dimmer
- ◆ USB power out for wireless DMX receiver
- ◆ LCD display color and dimmer value
- ◆ V/Gold mount battery and 3-pin DC IN
- ◆ All-metal housing with 4-leaf barn doors

Optional Accessories:



LA-BX300 Diffusing Box

LA-GS150 40° honeycomb

LA-POS150 Pole Operated Yoke



300W

PL-S300D
300W Bi-color Soft Panel LED Light

- ◆ 1200pcs ultra bright long-life SMD LEDs
- ◆ 2×1' size, 300W, 10000Lux @ 1meter ultra bright
- ◆ Fanless, absolute silent
- ◆ IEC 62471 Photobiological Safety certificate
- ◆ 2700K-6500K continuously adjustable
- ◆ 0-100% Smooth flick-free dimming
- ◆ Linear, Log, Exponential, S- dimming curves
- ◆ CRI Ra 96, TLCI 99, SSI (D55) 75
- ◆ DMX512 controlled color and dimmer
- ◆ USB power out for wireless DMX receiver
- ◆ PowerCON TRUE1 AC in and loop
- ◆ 3-pin XLR 48V DC power input
- ◆ All-metal housing with 4-leaf barn doors

Optional Accessories:



LA-BX300 Diffusing Box

LA-GS150 40° honeycomb

LA-POS150 Pole Operated Yoke



150W



PL-S150L
150W Bi-color Long Ratio Studio Panel

- ◆ 1152pcs ultra bright long-life SMD LEDs
- ◆ 3×0.5' long ratio for low ceiling studio install
- ◆ 150W, 4800Lux @ 1meter ultra bright
- ◆ Fanless, absolute silent
- ◆ IEC 62471 Photobiological Safety certificate
- ◆ 2700K-6500K continuously adjustable
- ◆ 0-100% Smooth non-linear flick-free dimming
- ◆ CRI Ra 97, TLCI 99, SSI (D55) 73
- ◆ DMX512 controlled color and dimmer
- ◆ USB power out for wireless DMX receiver
- ◆ LCD display color and dimmer value
- ◆ V/Gold mount battery and 3-pin DC IN
- ◆ All-metal housing with 2-leaf barn doors



300W
Ultra Bright

PL-S300H
300W Bi-color Hard Panel LED Light

- ◆ 280pcs high power long-life SMD LEDs
- ◆ 45° lens on each LED to produce intense hard light
- ◆ 2×1' size, 300W, 47000Lux @ 1meter ultra bright
- ◆ Fanless, absolute silent
- ◆ IEC 62471 Photobiological Safety certificate
- ◆ 2700K-6500K continuously adjustable
- ◆ Linear, Log, Exponential, S- dimming curves
- ◆ CRI Ra 96, TLCI 99, SSI (D55) 75
- ◆ DMX512 controlled color and dimmer
- ◆ USB power out for wireless DMX receiver
- ◆ PowerCON TRUE1 AC in and loop
- ◆ 3-pin XLR 48V DC power input
- ◆ All-metal housing with 4-leaf barn doors

Optional Accessories:



LA-BX300 Diffusing Box

LA-GS150 40° honeycomb

LA-POS150 Pole Operated Yoke



60W

FL-C60D 60W Bi-color COB Fresnel LED Light

- ◆ 60W ultra bright COB LED light
- ◆ 15°-60° Spot/Flood electromotive adjust
- ◆ 25,000Lux luminance @ 15° / 1 meter
- ◆ IEC 62471 Photobiological Safety certificate
- ◆ 2700K-8000K continuously adjustable
- ◆ Silent mode by fans switching off
- ◆ 0-100% flick-free dimming
- ◆ CRI Ra 95, TLCI 97
- ◆ DMX512 controlled Color temp, Dimmer & Spot angle
- ◆ USB power out for wireless DMX receiver
- ◆ LCD display color temp, dimmer and DMX addr
- ◆ 4-pin XLR DC 11-36V power input

Optional Accessories:



LA-POC60
2-cups Pole-operated Yoke

Mini Fresnel
Low Ceiling Studio




100W

FL-C100D 100W Bi-color Fanless COB Fresnel LED Light

- ◆ 100W ultra bright COB LED light
- ◆ 12°-26° Spot/Flood angle adjust
- ◆ 55,000Lux luminance @ 12° / 1 meter
- ◆ IEC 62471 Photobiological Safety certificate
- ◆ 2700K-6500K continuously adjustable
- ◆ Fanless, absolutely silent
- ◆ 0-100% flick-free dimming
- ◆ 5-pin DMX512 in & out
- ◆ USB power out for wireless DMX receiver
- ◆ LCD display color temp, dimmer and DMX addr
- ◆ PowerCON TRUE1 AC in and loop out

Optional Accessories:

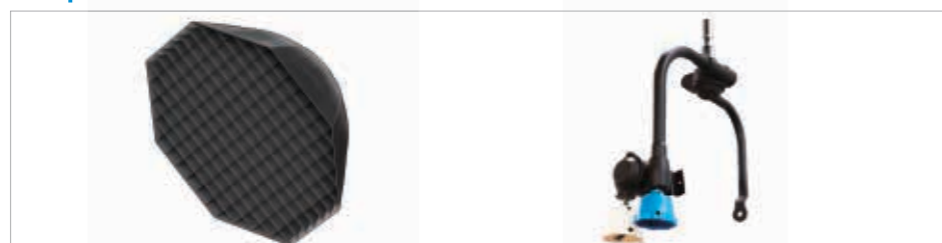

LA-BC90 Octangle Diffusing Box LA-POC100 Pole Operated Yoke



200W

FL-C200D 200W Bi-color COB Fresnel LED Light

- ◆ 200W ultra bright COB LED light
- ◆ 15°-50° Spot/Flood adjust
- ◆ Electromotive spot angel adjust (Optional E-motor)
- ◆ 65,000Lux luminance @ 15° / 1 meter
- ◆ IEC 62471 Photobiological Safety certificate
- ◆ 2700K-6500K continuously adjustable
- ◆ Silent mode by fans switching off
- ◆ CRI 97; TLCI 99; SSI(D55) 75
- ◆ DMX control: Color temp, Dimmer & Fan on/off
- ◆ DMX control: Spot/Flood angle (Optional E-motor)
- ◆ USB power out for wireless DMX receiver
- ◆ PowerCON TRUE1 AC in and loop out

Optional Accessories:



LA-BC90 Octangle Diffusing Box LA-POC200 Pole Operated Yoke LA-M50 Spot angle adjust E-motor



400W

FL-C400D 400W Bi-color COB Fresnel LED Light

- ◆ 400W ultra bright COB LED light
- ◆ 15°-50° Spot/Flood adjust
- ◆ Electromotive spot angel adjust (Optional E-motor)
- ◆ 130,000Lux luminance @ 15° / 1 meter
- ◆ IEC 62471 Photobiological Safety certificate
- ◆ 2700K-6500K continuously adjustable
- ◆ Silent mode by fans switching off
- ◆ CRI 97; TLCI 99; SSI(D55) 75
- ◆ DMX control: Color temp, Dimmer & Fan on/off
- ◆ DMX control: Spot/Flood angle (Optional E-motor)
- ◆ USB power out for wireless DMX receiver
- ◆ PowerCON TRUE1 AC in and loop out

Optional Accessories:



LA-BC90 Octangle Diffusing Box LA-POC200 Pole Operated Yoke LA-M50 Spot angle adjust E-motor



RadioLux



RadioLux Tx
Transmitter to connect DMX console

RadioLux Rx
Receiver to connect DMX light

RadioLux Tx/Rx Wireless DMX512 Transmission System

- ◆ 863-928MHz license free wireless tech
- ◆ Anti-interference reliable DMX512 transmission
- ◆ Transmitter connected with any DMX console
- ◆ Receiver connected with any DMX light fixtures
- ◆ Unlimited quantity of Receivers linkable
- ◆ 500m / 1600ft long range receiving distance
- ◆ Less than 0.03 seconds low latency
- ◆ Transmitter powered by 4-pin XLR DC
- ◆ Receiver powered by 5V USB-A



LA-WR8
Pocket Console with Transmitter Built-in



LA-WR8-R
Receiver to connect DMX light

LA-WR8 8-ch Pocket Wireless DMX Console

- ◆ Pocket size portable DMX console
- ◆ 2.4G wireless quick connection with light adaptors
- ◆ 400m (LOS) transmission distance
- ◆ Compactible with all standard DMX512 lights
- ◆ 8 faders × 7 groups switching
- ◆ Transmitter powered by 2 × AA batteries or Micro USB
- ◆ Receiver powered by 5V USB-A



LA-R160 16-ch DMX512 Light Console

- ◆ Standard DMX512 signal control with isolater
- ◆ 8× faders with A/B page switch to 16 channels
- ◆ 1× Master fader control all 16 channels
- ◆ 3-pin XLR DMX in, provide 5-pin converter
- ◆ AC-DC 9V 1A input, 2W power consumption
- ◆ Support 9V PP3 battery power
- ◆ Support 9.5-inch half rack size 3U install



LA-R240 24-ch DMX512 Light Console

- ◆ Standard DMX512 signal control with isolater
- ◆ 24x channel faders, 6x Group faders, 1x Master fader
- ◆ Up to 4 units series connection, Max 96 channels control
- ◆ 3-pin XLR DMX in and loop out, provide 5-pin converters
- ◆ 1x USB-A power output
- ◆ PowerCON AC 88-256V wide input and loop out
- ◆ 19-inch rack mountable size




LA-R480 48-ch DMX512 Light Console

- ◆ Standard DMX512 signal control with isolater
- ◆ 24x channel faders, 6x Group faders, 1x Master fader
- ◆ Page A/B switch to support 48 channels control
- ◆ Up to 4 units series connection, Max 192 channels control
- ◆ 3-pin XLR DMX in and loop out, provide 5-pin converters
- ◆ 1x USB-A power output
- ◆ PowerCON AC 88-256V wide input and loop out
- ◆ 19-inch rack mountable size



LA-R960 96-ch DMX512 Light Console

- ◆ Standard DMX512 signal control with isolater
- ◆ 48x channel faders, 12x Group faders, 1x Master fader
- ◆ Page A/B switch to support 96 channels control
- ◆ 5-pin XLR DMX in and loop out
- ◆ Support RDM remote DMX address setting
- ◆ 1x USB-A power output
- ◆ PowerCON AC 88-256V wide input

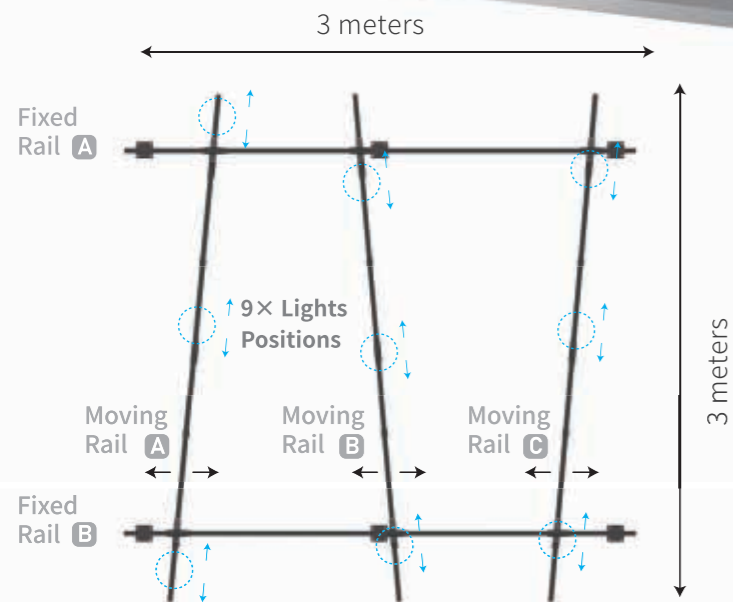

GA-CR3009 3x3m Studio Light Ceiling Rail System

- ◆ 3 meters fixed rails × 2
- ◆ 3 meters moving rails × 3
- ◆ Install 9 × studio lights
- ◆ 5/8" baby pin heads
- ◆ Provide pantograph install adaptors
- ◆ Provide cable pullys for each light
- ◆ Include 1.3 - 3m adjusting rod



Standard Kit Package

Fixed Rail 3 meters (2 × 1.5m joint), to be fixed onto the ceiling.




Moving Rail 3 meters (2 × 1.5m joint), connect with Fixed Rail by the Double Rail Pulley.



Adjusting Rod 1.3m - 3m stretch, to unbrake and move the lights.



Ceiling Fix Plate
To install the Fixed Rail onto the ceiling. Using 3 fix plates for each rail.



Double Rail Pulley
Install between the Fixed Rail and Moving Rail, with brake for each rail.




Light Pulley
To Install lights onto the Moving Rail, 5/8" (16mm) baby pin head, with brake.



Pantograph Adaptor
5/8" baby pin receiver for the light pully to install SWIT GA-PT pantographs.



Cable Pulley
Install onto the Moving Rail to fix cables.



Precise Positioning Pantograph

- ◆ Aluminum alloy heavy duty 23kg load
- ◆ Spring counter balance adjust
- ◆ Stay in any position with precision
- ◆ Connect with hook by screw bolt
- ◆ Connect with light by screw bolt

Length Option

Model	Working Length
GA-PT20P	0.5m - 2m, 7 sections
GA-PT30P	0.6m - 3m, 9 sections
GA-PT50P	0.8m - 5m, 19 sections



DMX Motorized Pantograph

- ◆ Aluminum alloy heavy duty 30kg load
- ◆ DMX motorized stretch control
- ◆ 10cm per second moving speed
- ◆ 5-pin DMX in & loop out
- ◆ PowerCON True1 AC power in & loop out
- ◆ Connect with hook by screw bolt
- ◆ Connect with light by screw bolt

Length Option

Model	Working Length
GA-PT20E	0.5m - 2m, 7 sections
GA-PT30E	0.6m - 3m, 9 sections
GA-PT50E	0.8m - 5m, 19 sections



GA-DG75 75kg Load Studio Light Hook

- ◆ Aluminum alloy 75kg load hook
- ◆ 30-51mm diameter truss fit
- ◆ Screw bolt and M8 nut connection
- ◆ Fit studio light yoke directly
- ◆ Fit GA-PT pantograph



GA-DG300 300kg Load Studio Light Hook

- ◆ Aluminum alloy 300kg load hook
- ◆ 16-52mm diameter truss fit
- ◆ 1-1/8" (29mm) Junior Pin Receiver
- ◆ Fit studio light yoke directly
- ◆ Fit Pole operated yoke





MUF50
5kg Portable Travel Tripod Kit

- ◆ 4-section leg, 43-149cm adjustment
- ◆ 5kg load fluid head with Dynamic counter balance
- ◆ 360° pan and -75° ~ +90° tilt motion
- ◆ Reverse center column to low angle shooting
- ◆ Anti-pinch locks and rubber feet



MUF100C
10kg Carbon Fiber Travel Tripod Kit

- ◆ 8-layer tubular carbon fiber travel tripod
- ◆ 3-section leg, 40-170cm adjustment
- ◆ 25°-75° leg angle adjustment
- ◆ 10kg load fluid head with Dynamic counter balance
- ◆ 360° pan and -75° ~ +90° tilt motion
- ◆ Anti-pinch locks and rubber feet



TOWER100
10kg Studio Camera Tripod Kit


- ◆ 3-section leg, 72-153cm adjustment
- ◆ 10kg load fluid head with Dynamic counter balance
- ◆ 360° pan and -75° ~ +90° tilt motion
- ◆ With mid spreader to strengthen stability
- ◆ Anti-pinch locks and rubber feet



TOWER150/150C
15kg Studio Camera Tripod Kit

- ◆ 3-section leg, 50-170cm adjustment
- ◆ One buckle release and lock 3 sections
- ◆ 15kg load smooth motion fluid head
- ◆ Pan and tilt damping adjusting
- ◆ 360° pan and -75° ~ +90° tilt motion
- ◆ With ground stretcher and horseshoe feet

TOWER150: Aluminum alloy
TOWER150C: 8-layer Carbon fiber

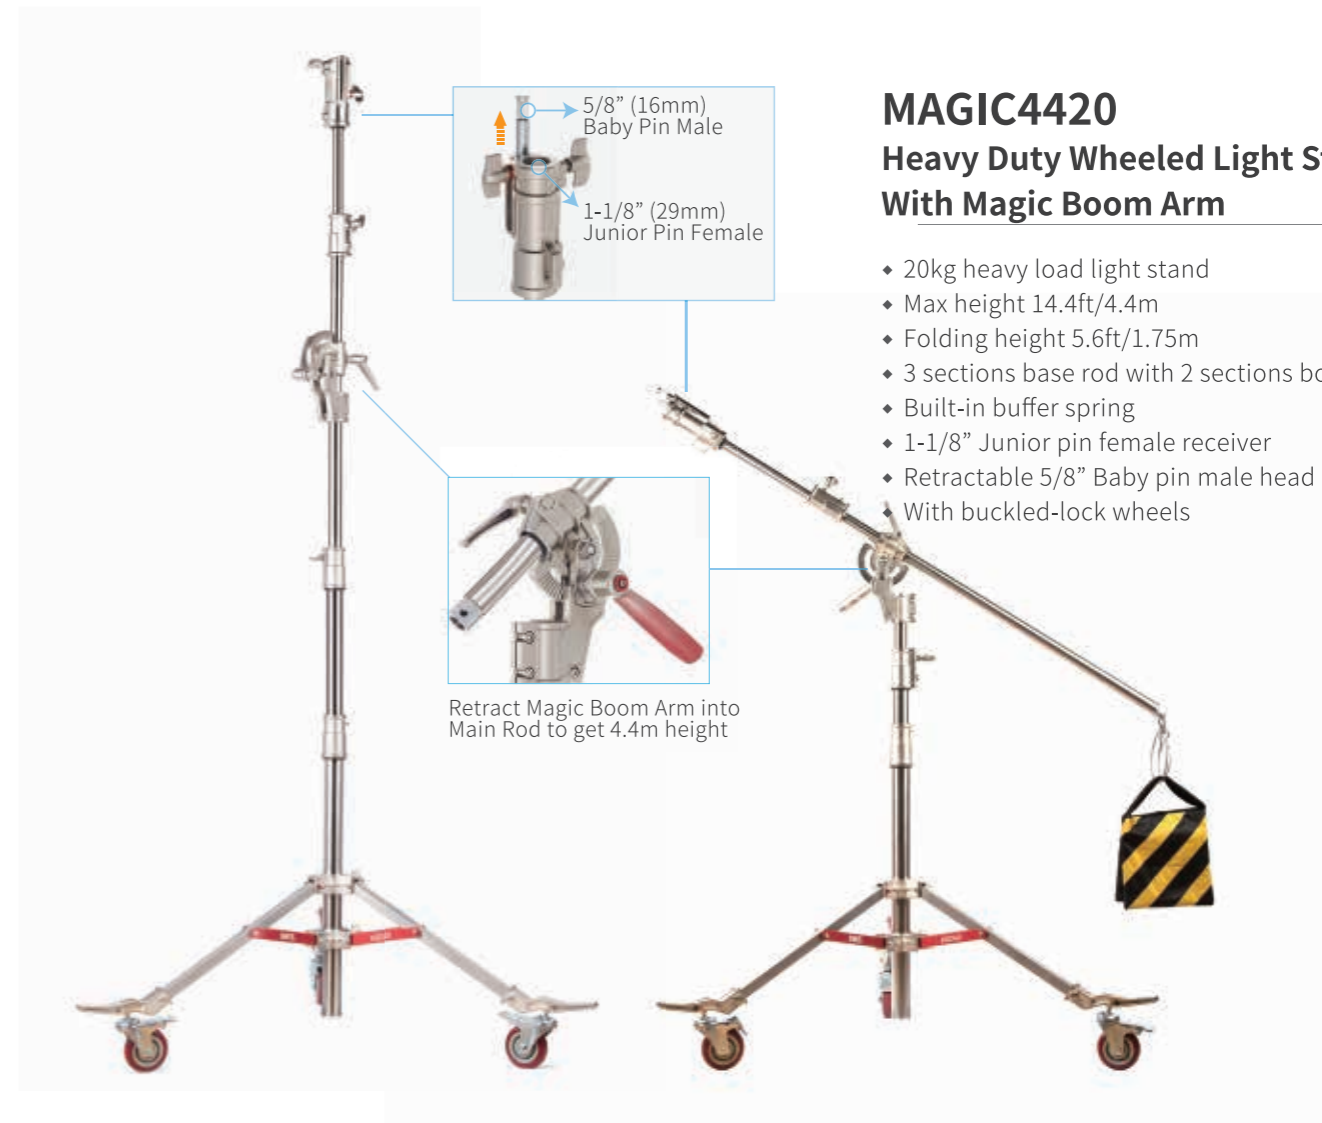

MAGIC4420
Heavy Duty Wheeled Light Stand
With Magic Boom Arm

- ◆ 20kg heavy load light stand
- ◆ Max height 14.4ft/4.4m
- ◆ Folding height 5.6ft/1.75m
- ◆ 3 sections base rod with 2 sections boom arm
- ◆ Built-in buffer spring
- ◆ 1-1/8" Junior pin female receiver
- ◆ Retractable 5/8" Baby pin male head
- ◆ With buckled-lock wheels



DS-8707A
4kg Load Portable Light Stand

- ◆ 4 sections foldable light stand
- ◆ 5/8" baby pin with 1/4" screw head
- ◆ 50cm foldable, Max height 170cm



QH-J2200
6kg Load Portable Light Stand

- ◆ 3 sections foldable light stand
- ◆ 5/8" baby pin with 1/4" and 3/8" head
- ◆ 70cm foldable, Max height 223cm



QH-J288C
8kg Load Air Cushioned Light Stand

- ◆ 3 air cushioned sections light stand
- ◆ 5/8" baby pin with 1/4" and 3/8" head
- ◆ 105cm foldable, Max height 250cm